



KTM DUKE

125 / 250 / 390 MODEL 2017+



TAIL TIDY

Installation Instructions

Installation Instructions

Kit contents

- A** 1x base plate
- B** 1x cover plate
- C** 1x number plate bracket
- D** 1x central unit
- E** 1x slide doors
- F** 2x indicator stems
- G** 2x indicator screw
- H** 8x M6 15mm countersunk screw
- I** 2x M6 10mm socket cap screw
- J** 2x M5 10mm countersunk screw
- K** 2x M5 10mm hex bolt

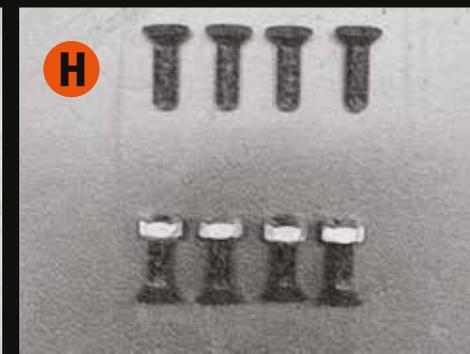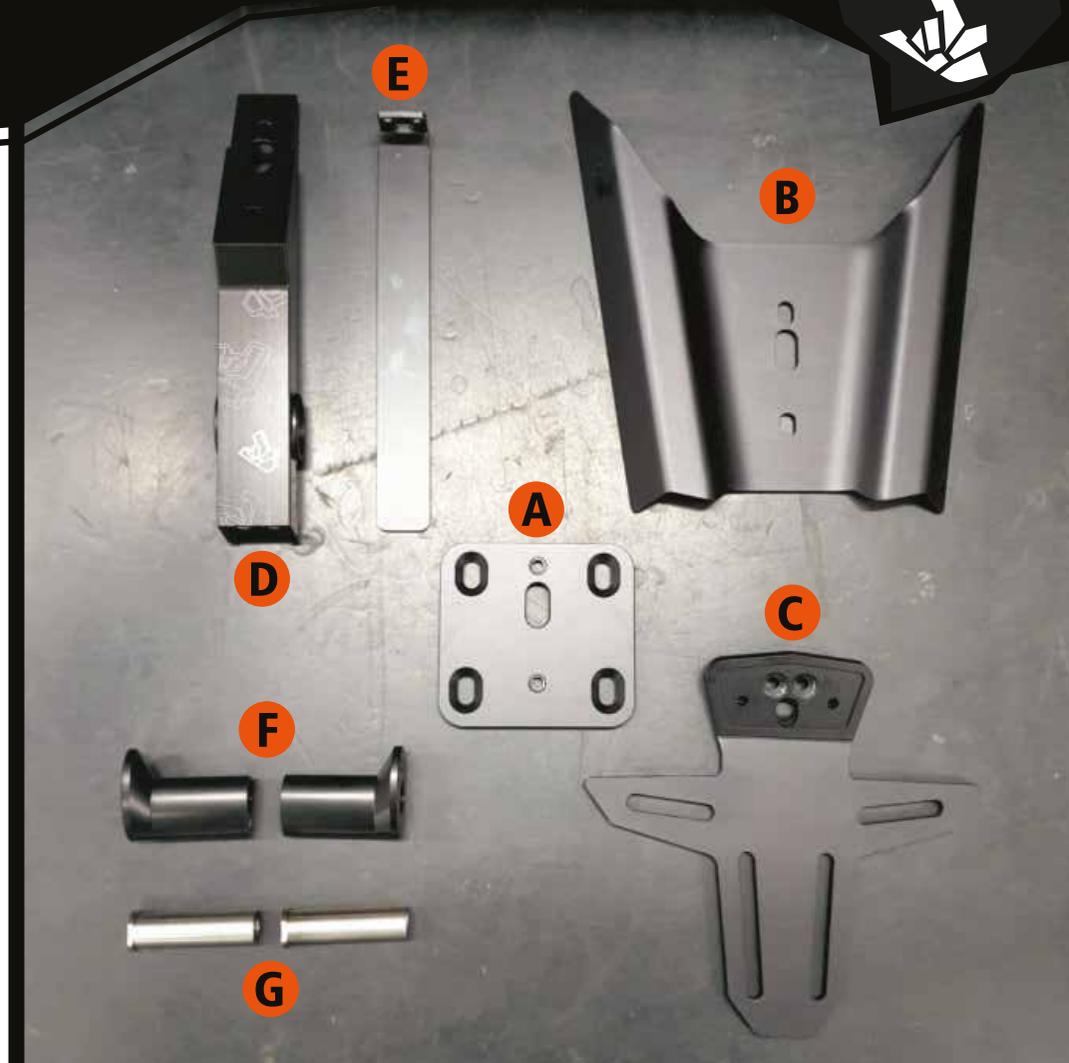

Installation Instructions




Tools needed

- Wrench size 8, 10, 12
- Allen key size 3, 4, 5
- Hexagonal head screwdriver size 3
- Crosstip screwdriver


WARRIORS
PERFORMANCE

* Tools, recommended by our mechanics; proper installation can also be carried out with different tools

Installation Instructions 1

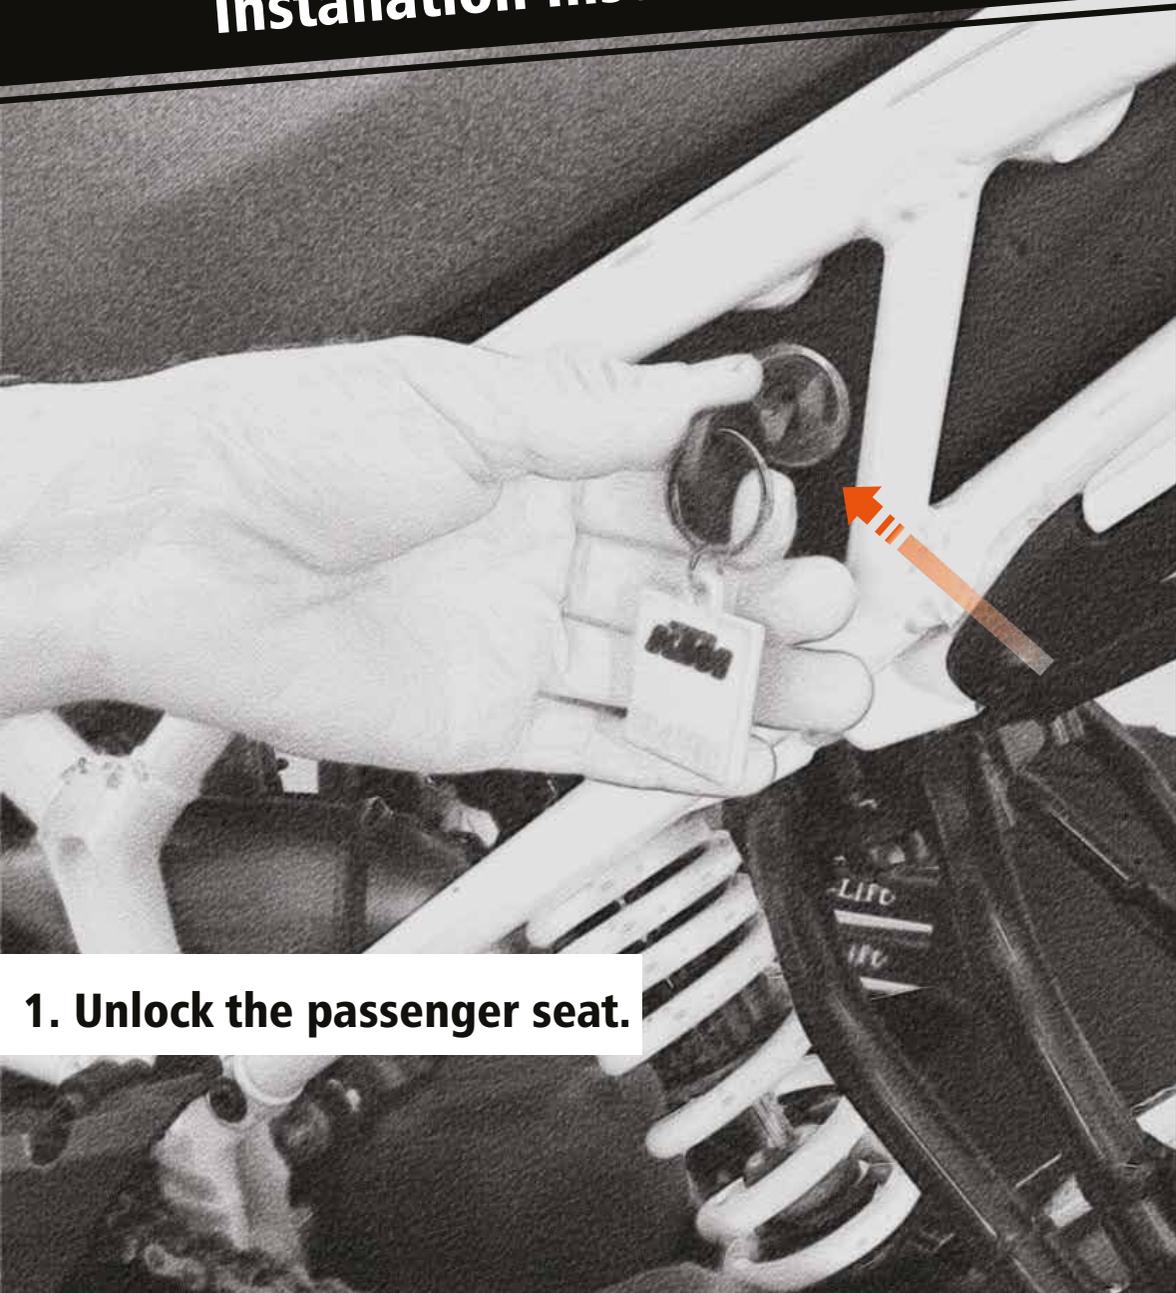


1. Unlock the passenger seat.

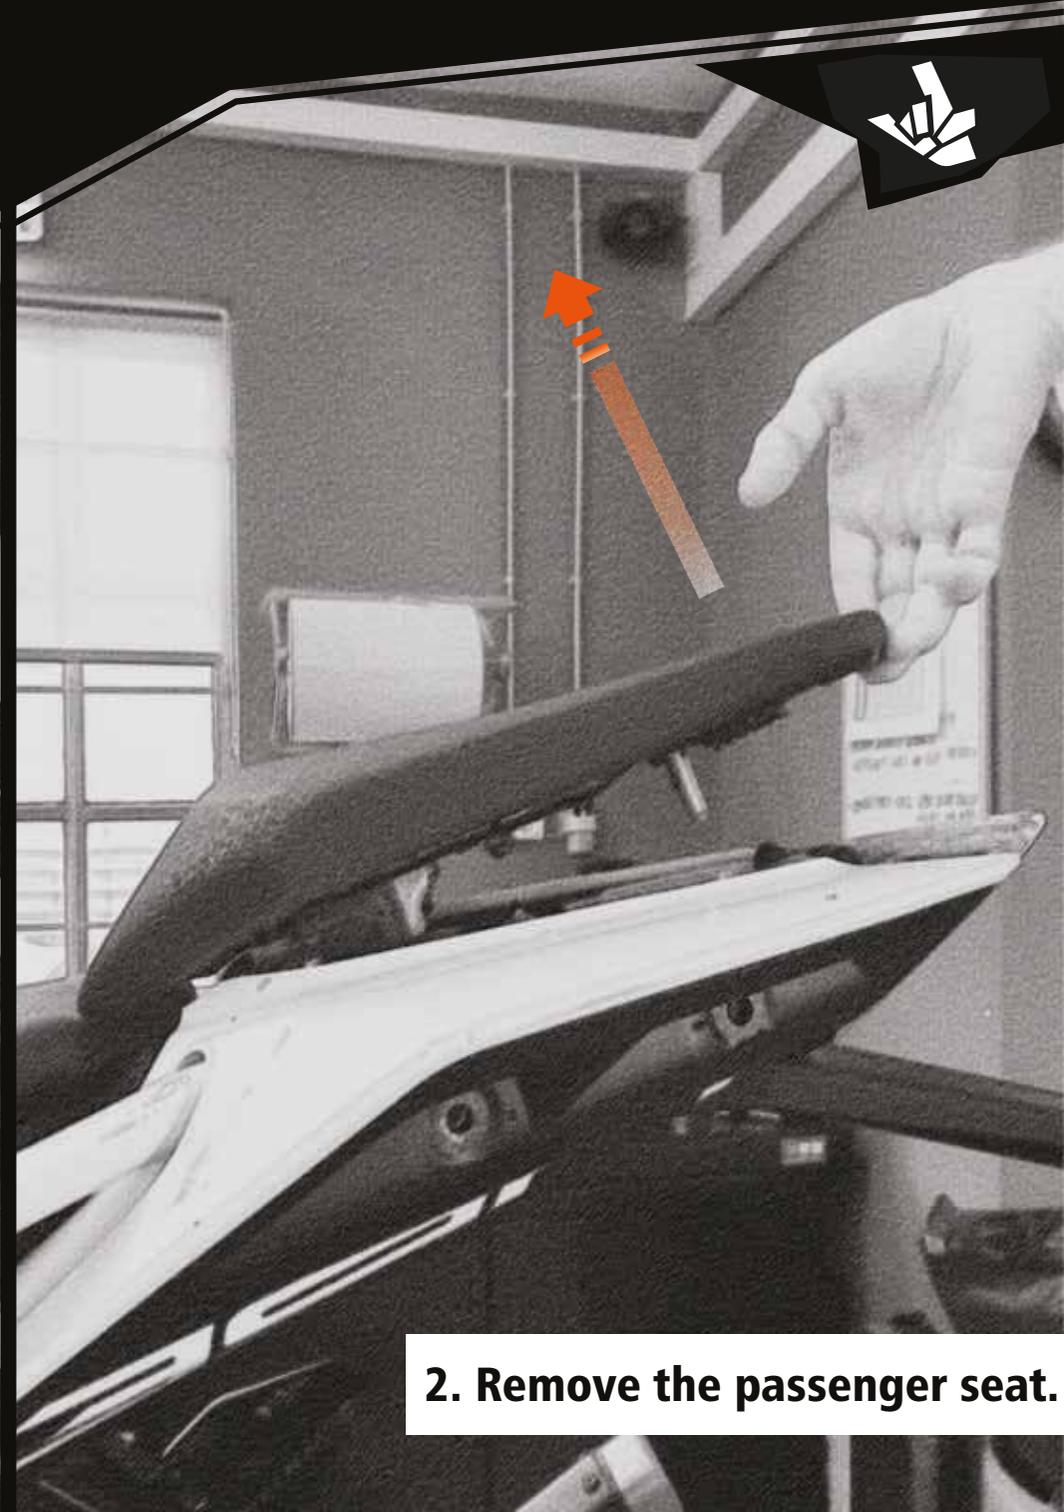

2. Remove the passenger seat.



Installation Instructions 2

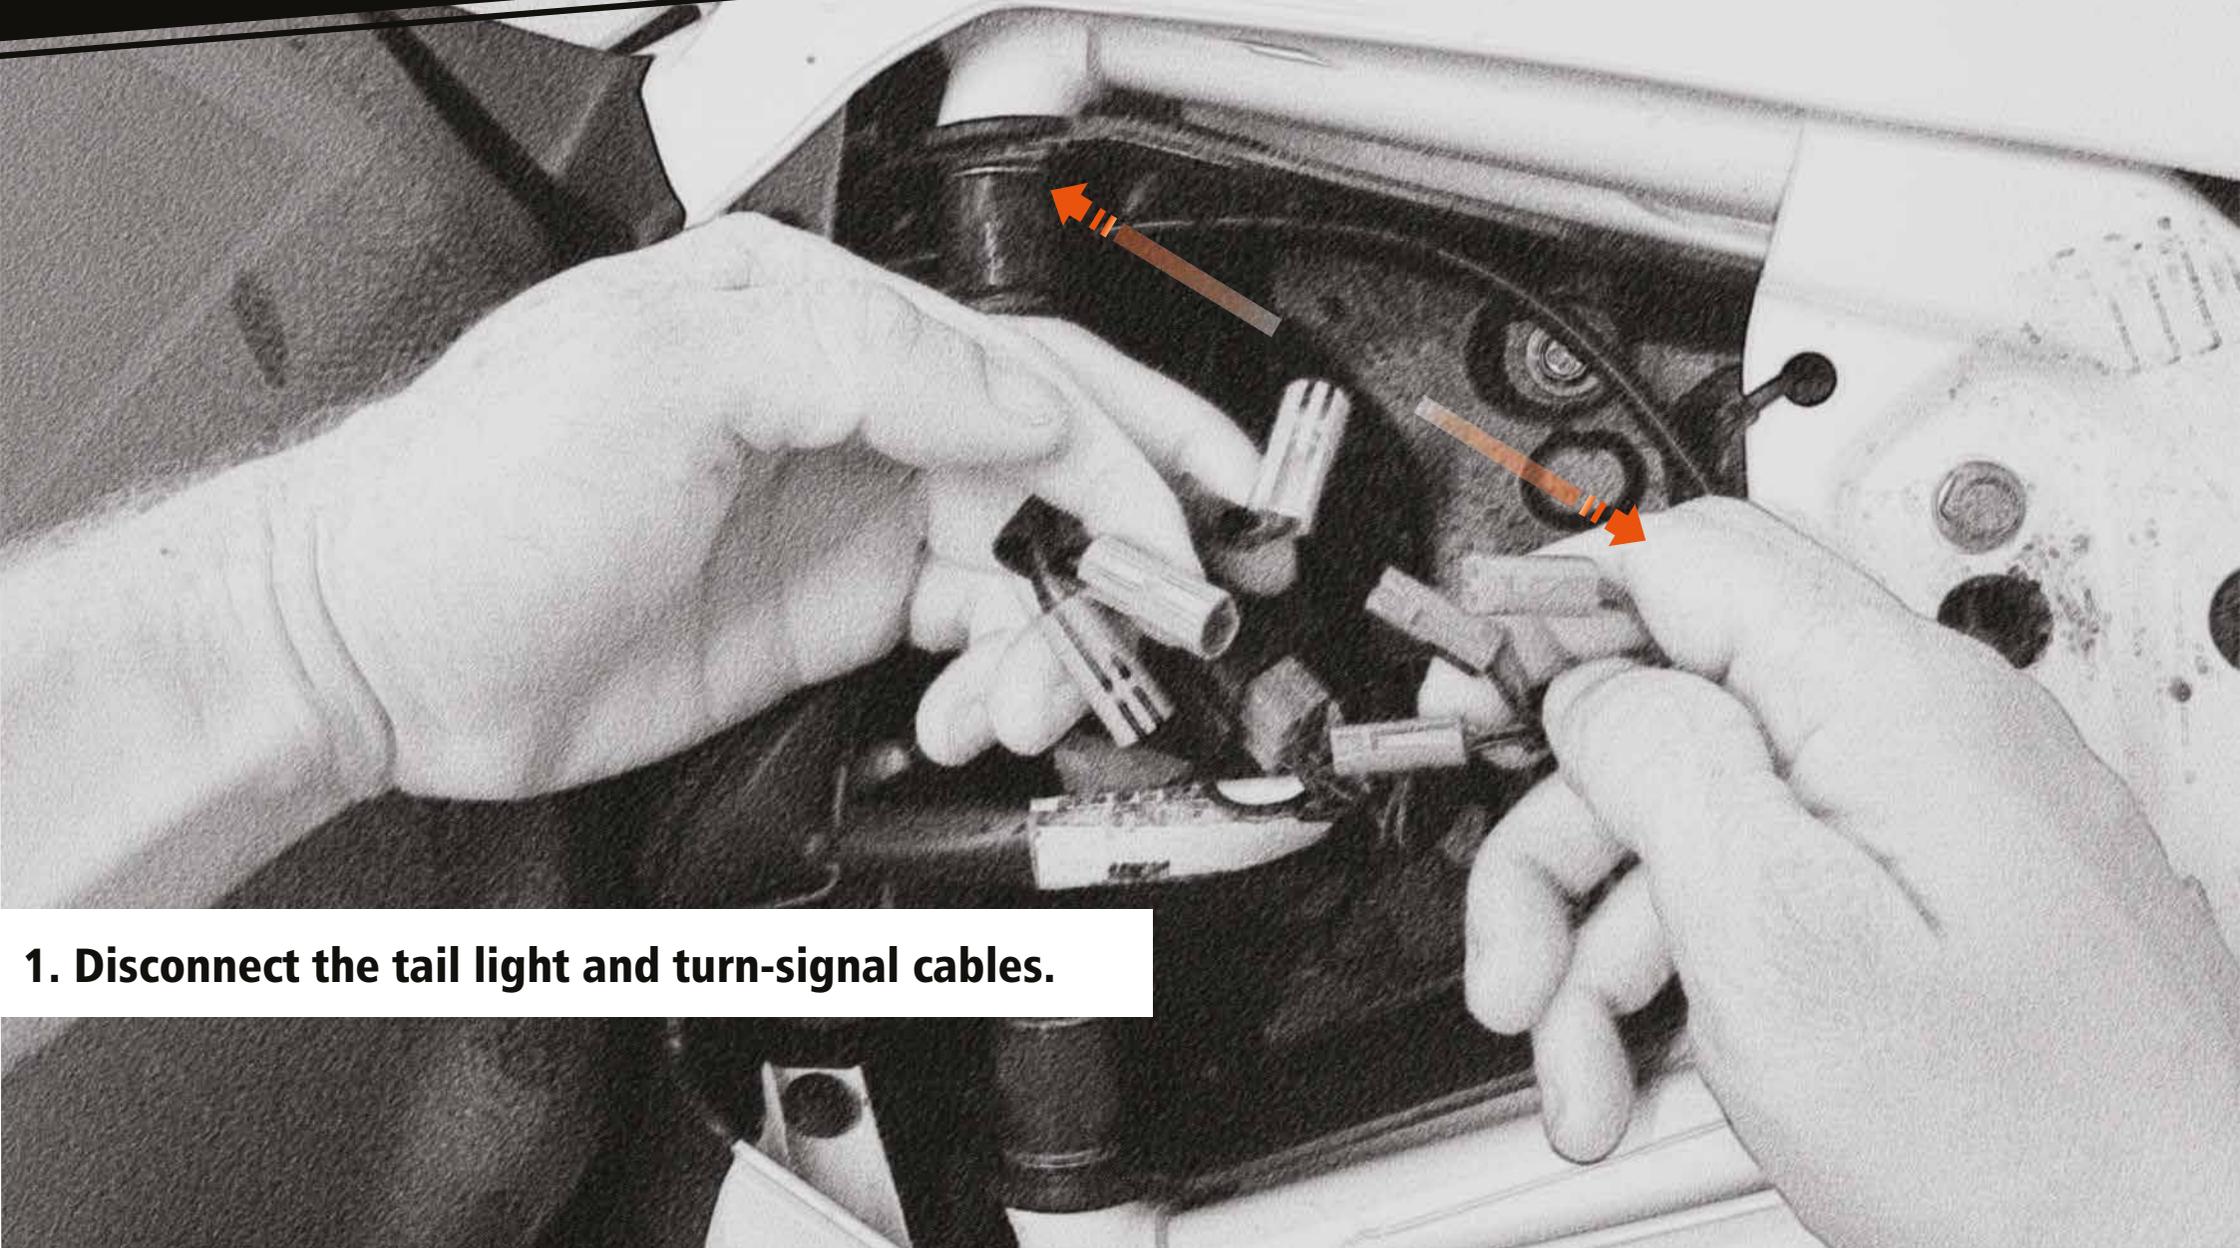


1. Disconnect the tail light and turn-signal cables.

Installation Instructions 3




1. Remove the 4 bolts from tail light.

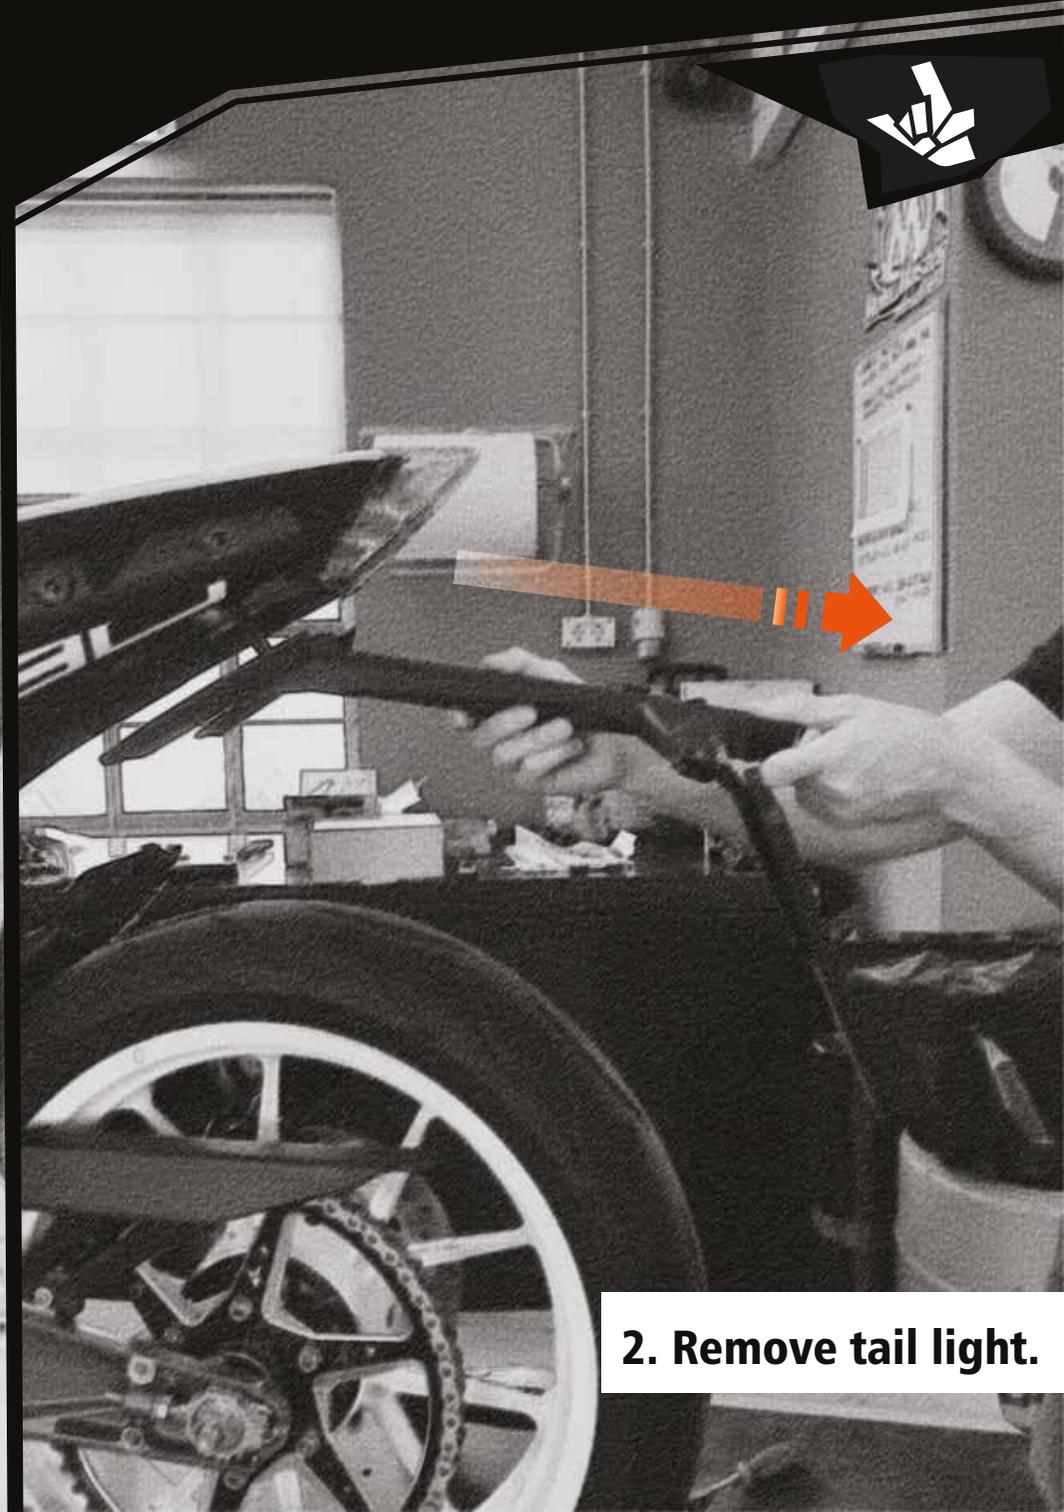


2. Remove tail light.

Installation Instructions 4

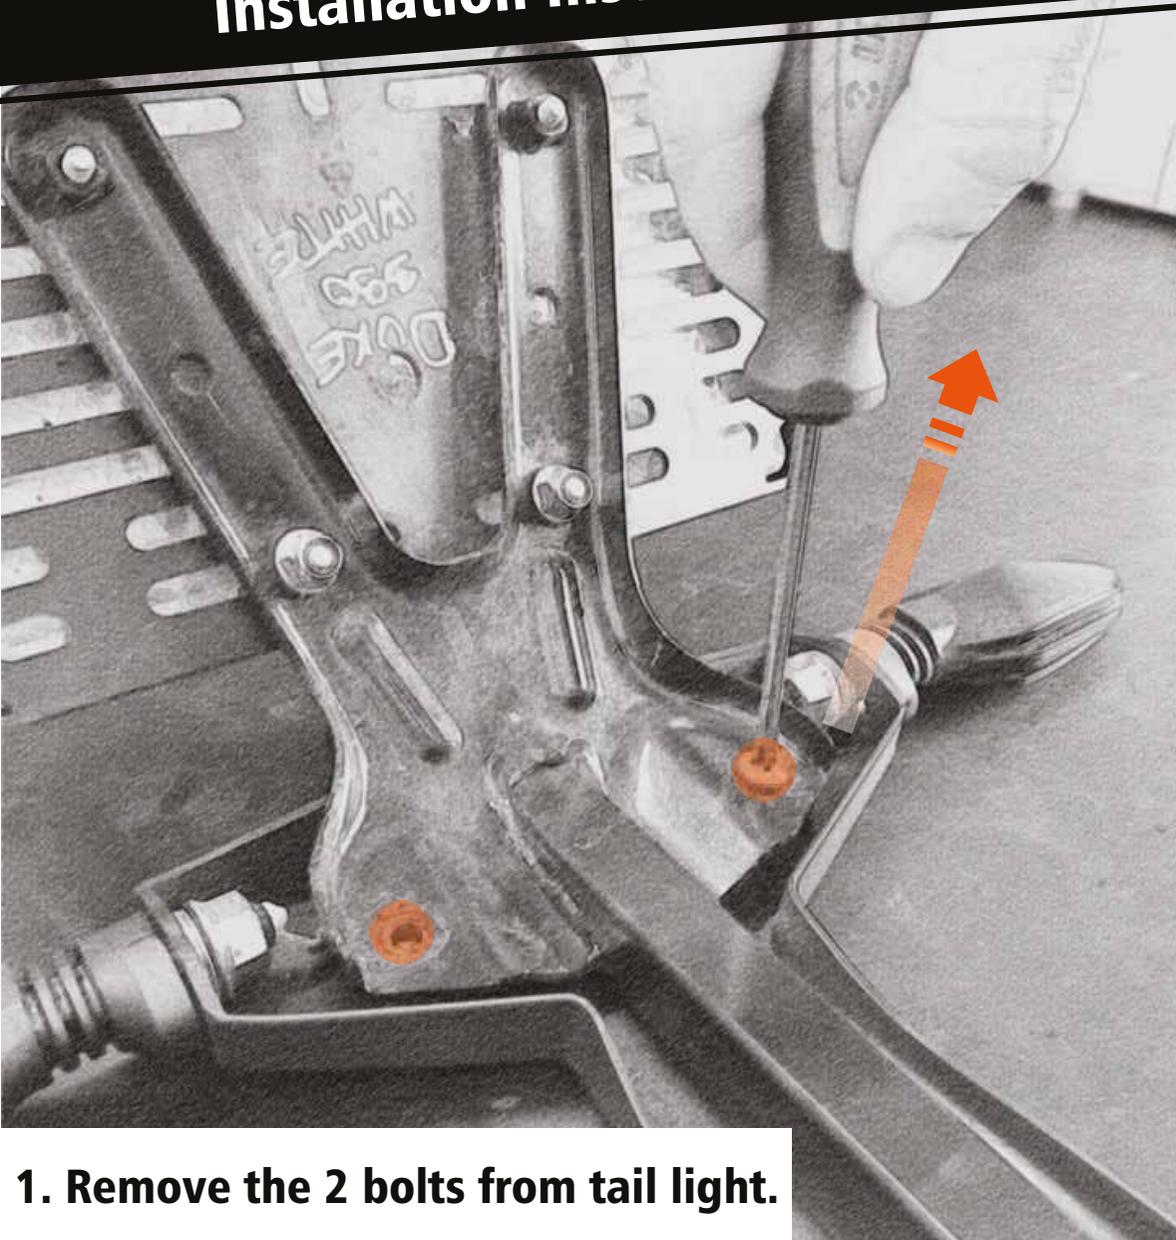


1. Remove the 2 bolts from tail light.

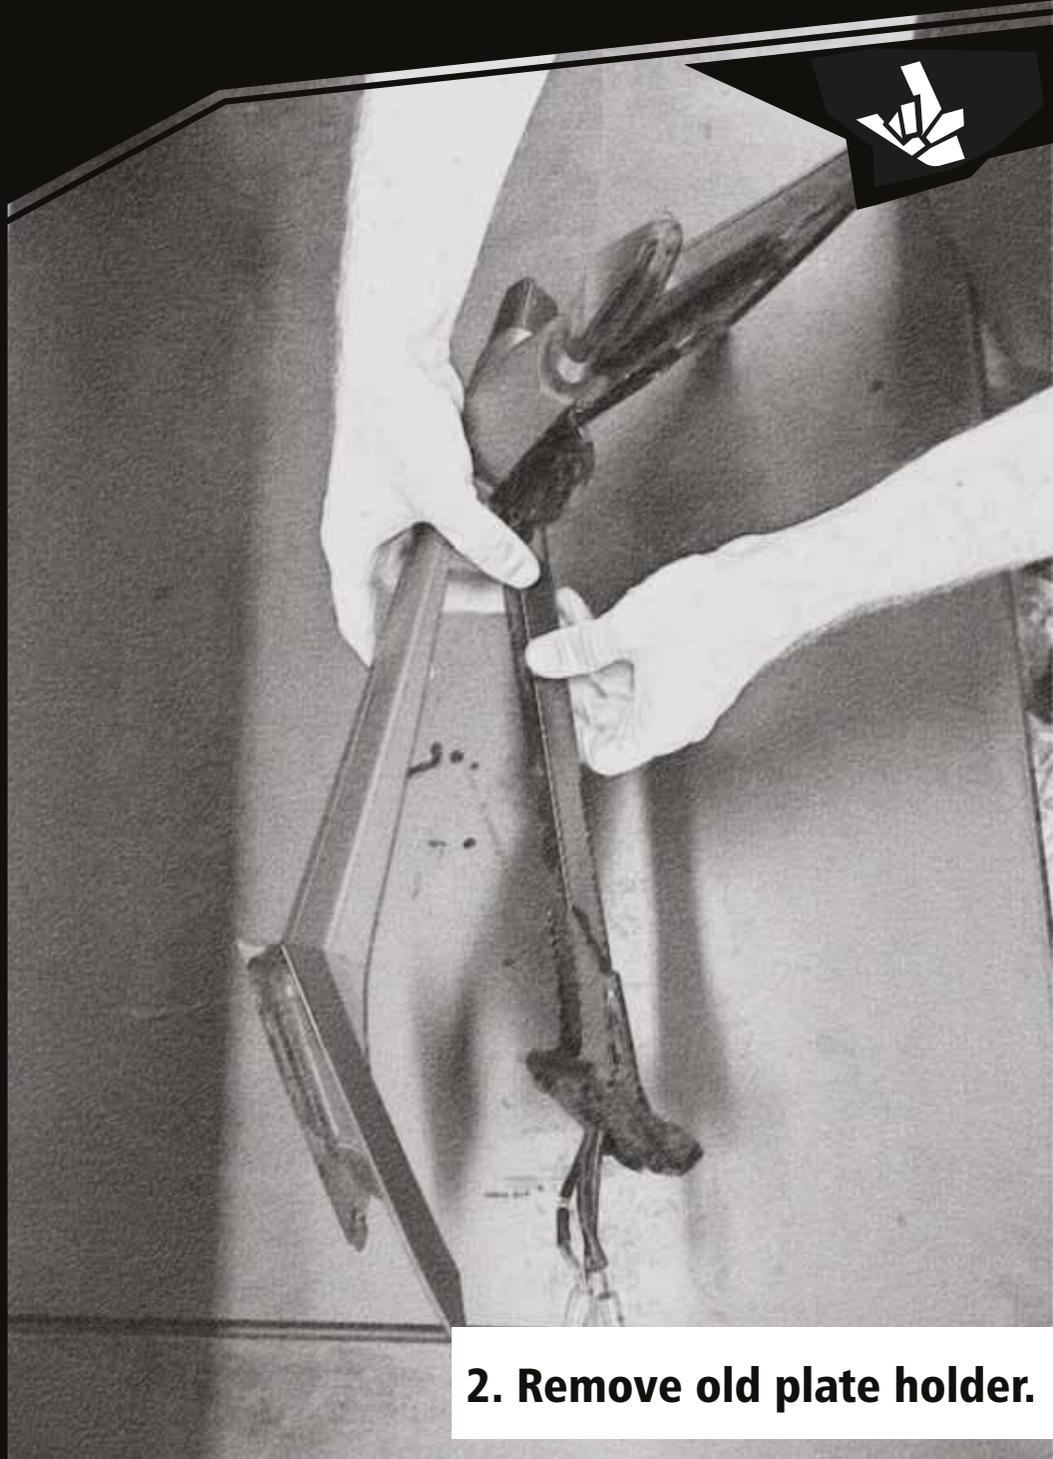


2. Remove old plate holder.

Installation Instructions 4.1

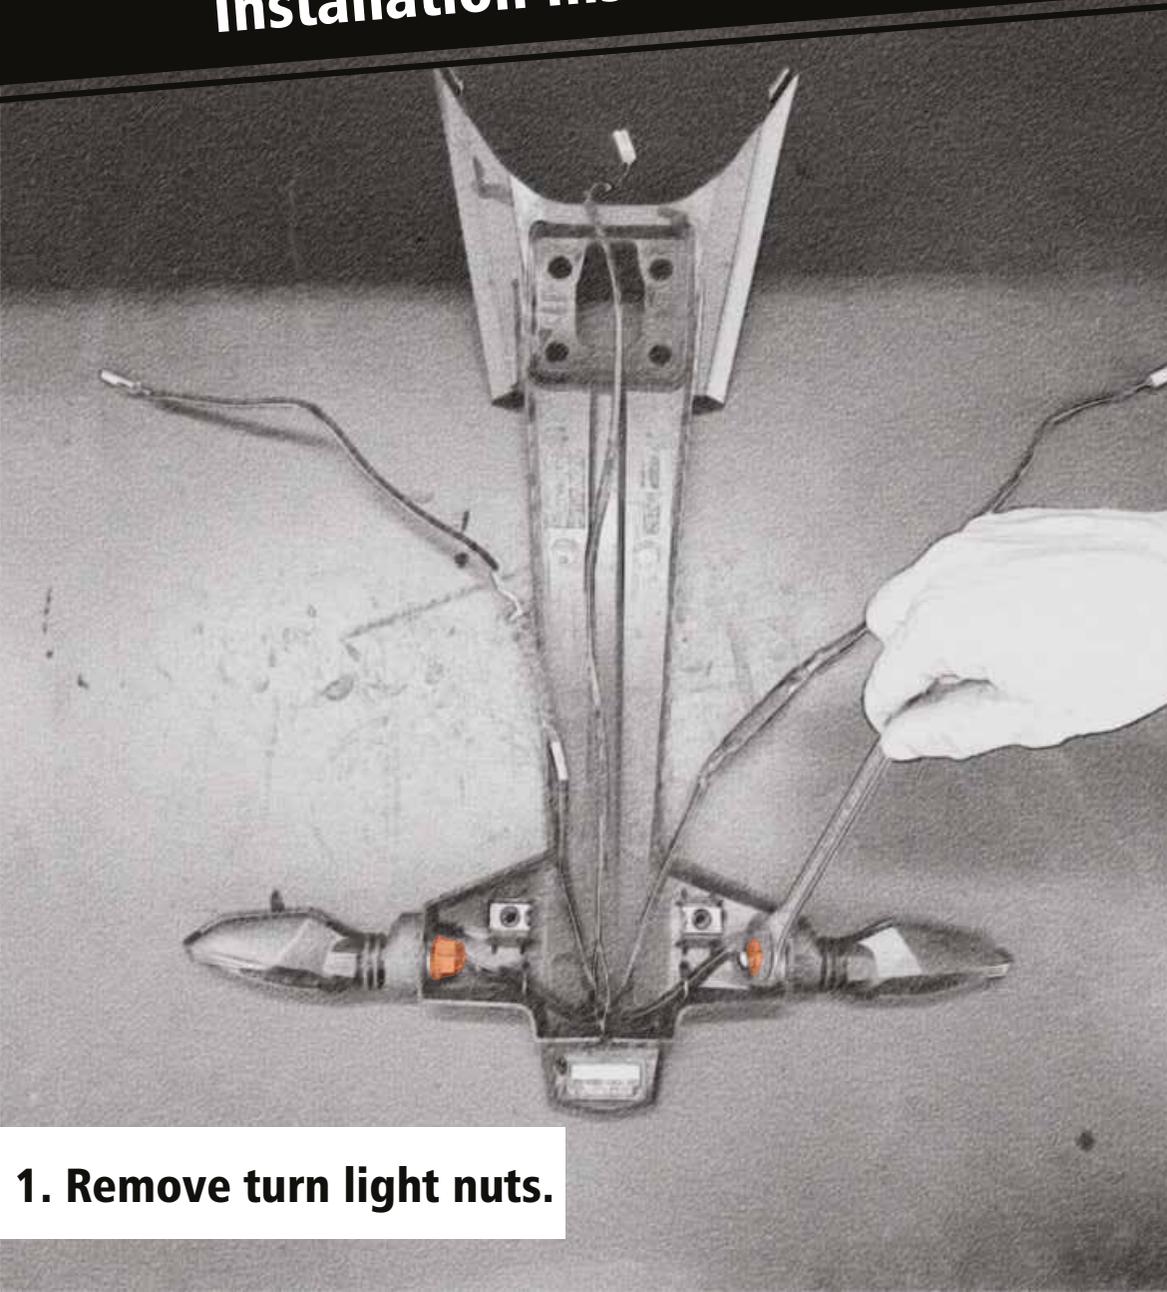


1. Remove turn light nuts.

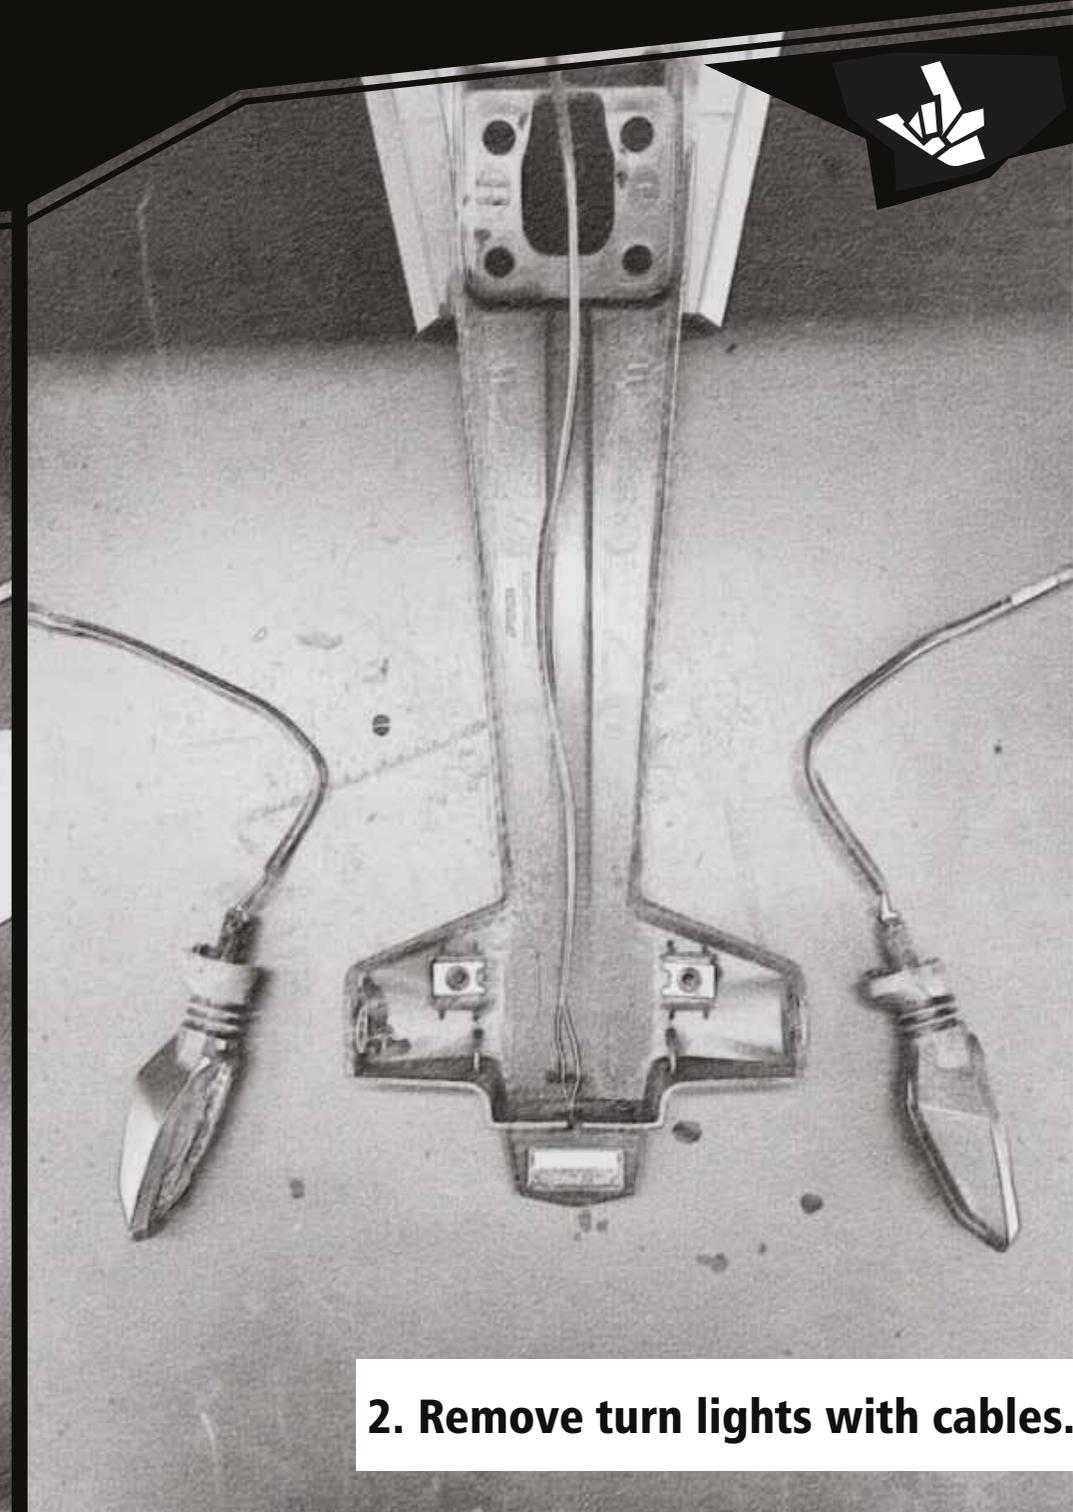



2. Remove turn lights with cables.

Installation Instructions 4.2

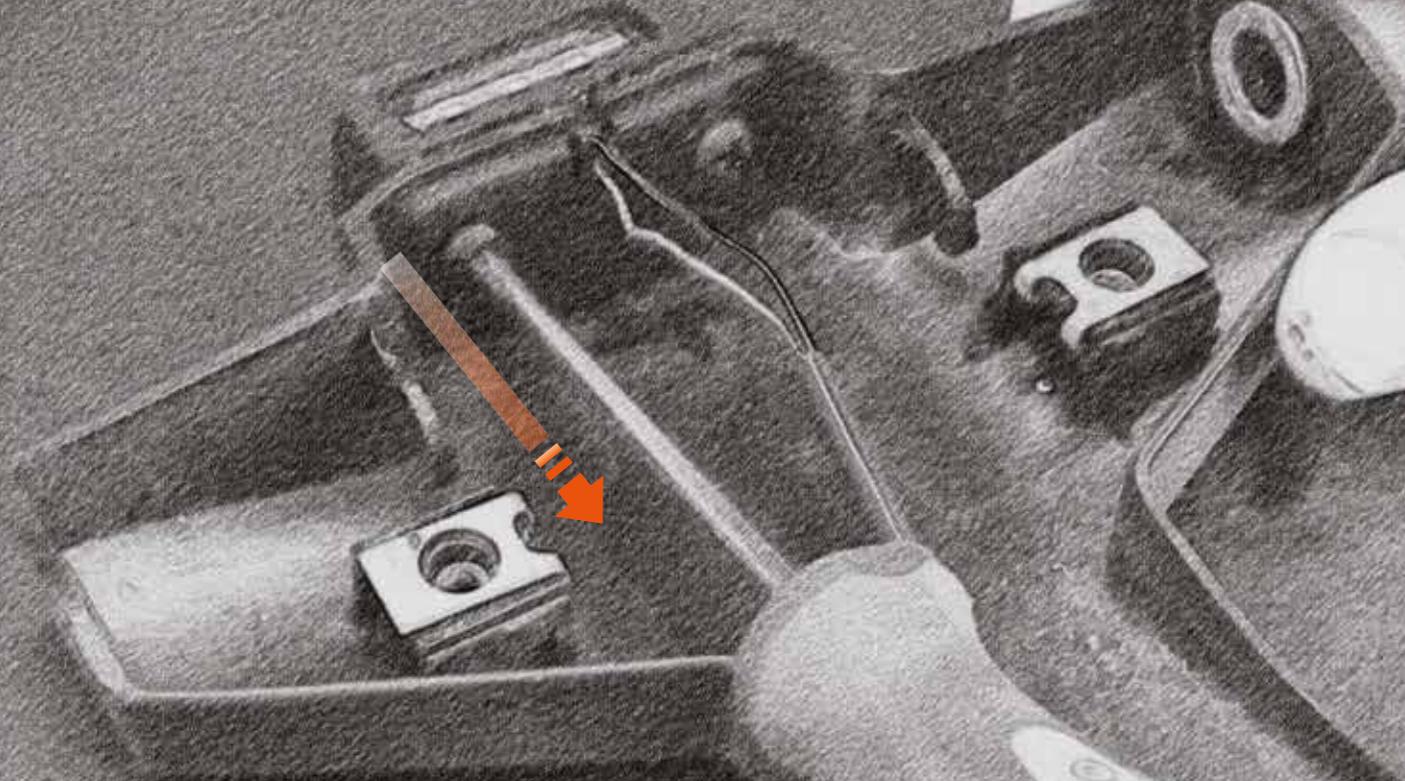

1. Remove the 2 number plate light bolts (will be re-used later).

Installation Instructions 5

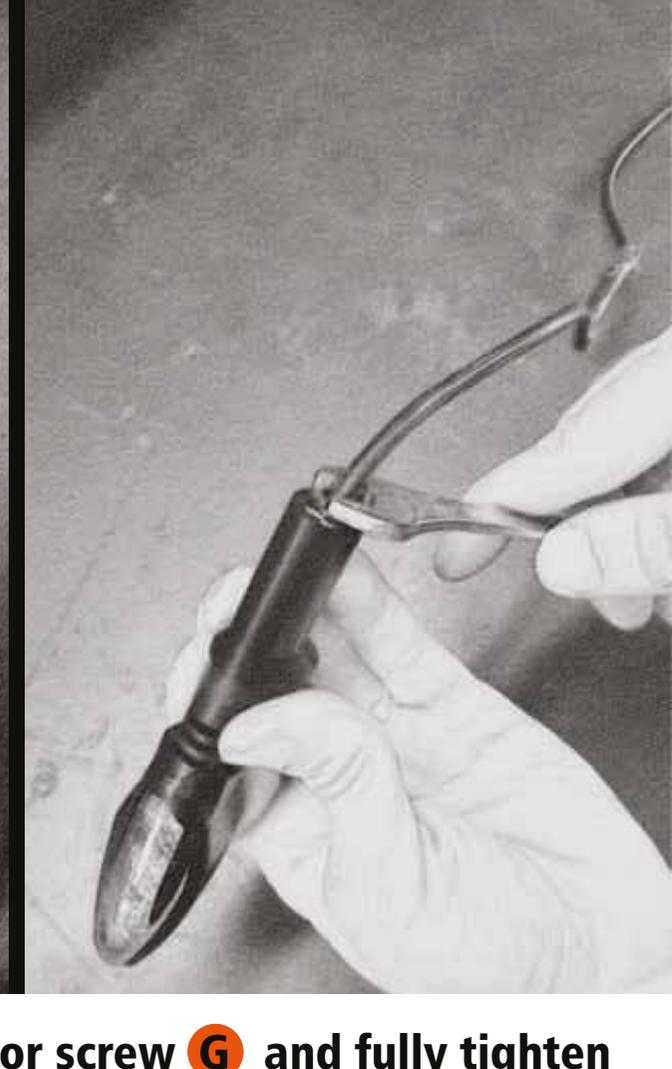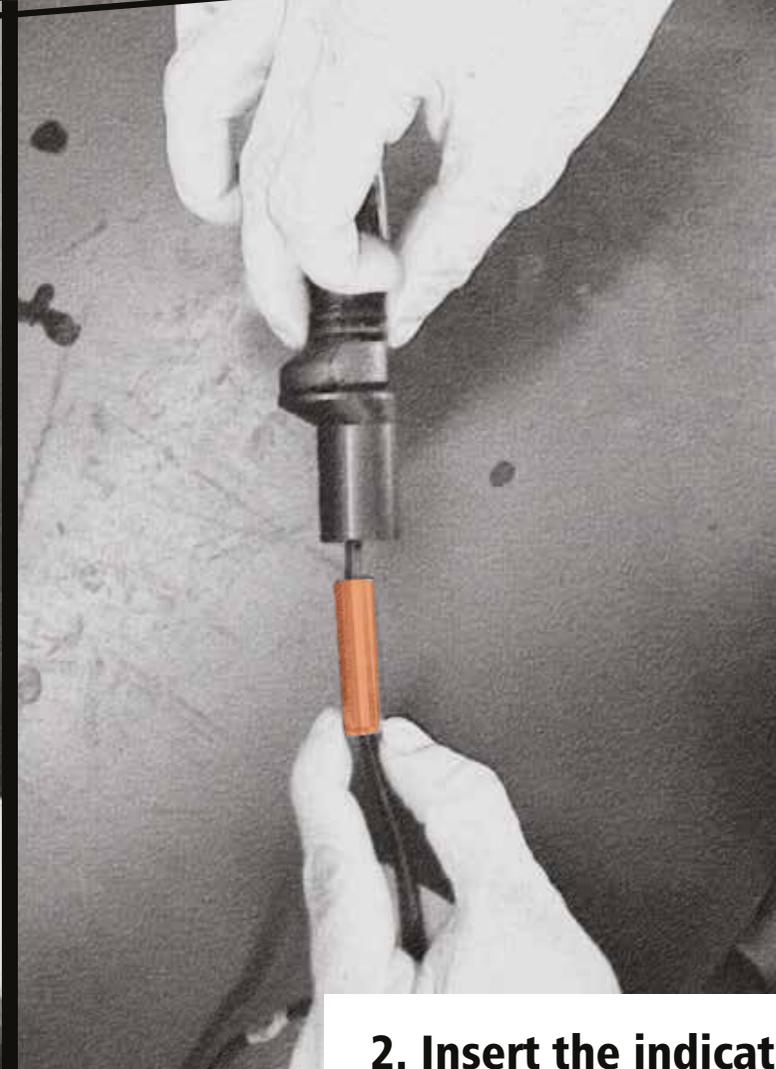


1. Place turn light cable through indicator stem **F**


2. Insert the indicator screw **G** and fully tighten with size 12 wrench.



Installation Instructions 6

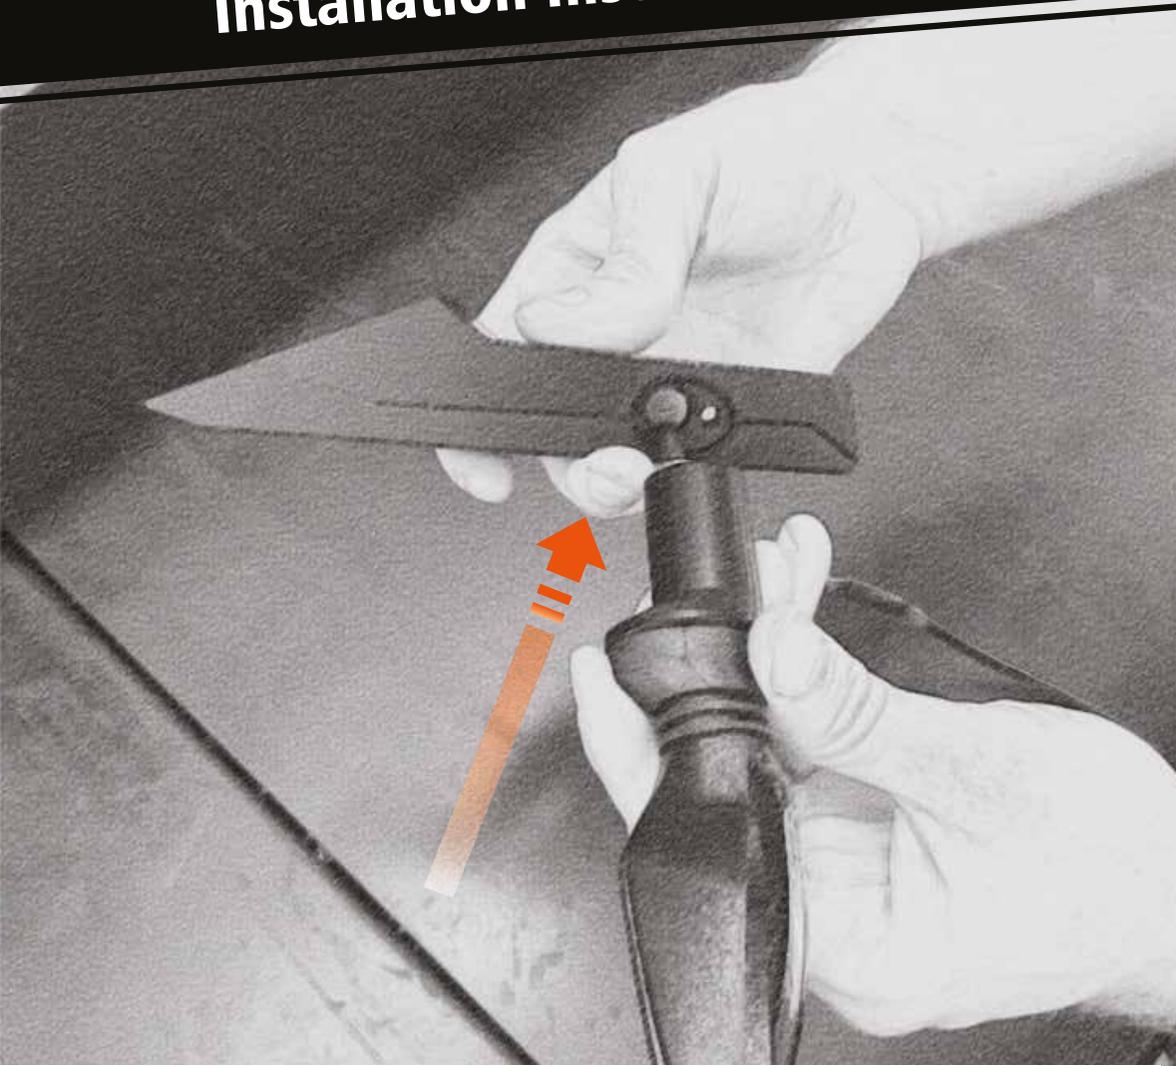

1. Put turn light cable through the central unit **D**.

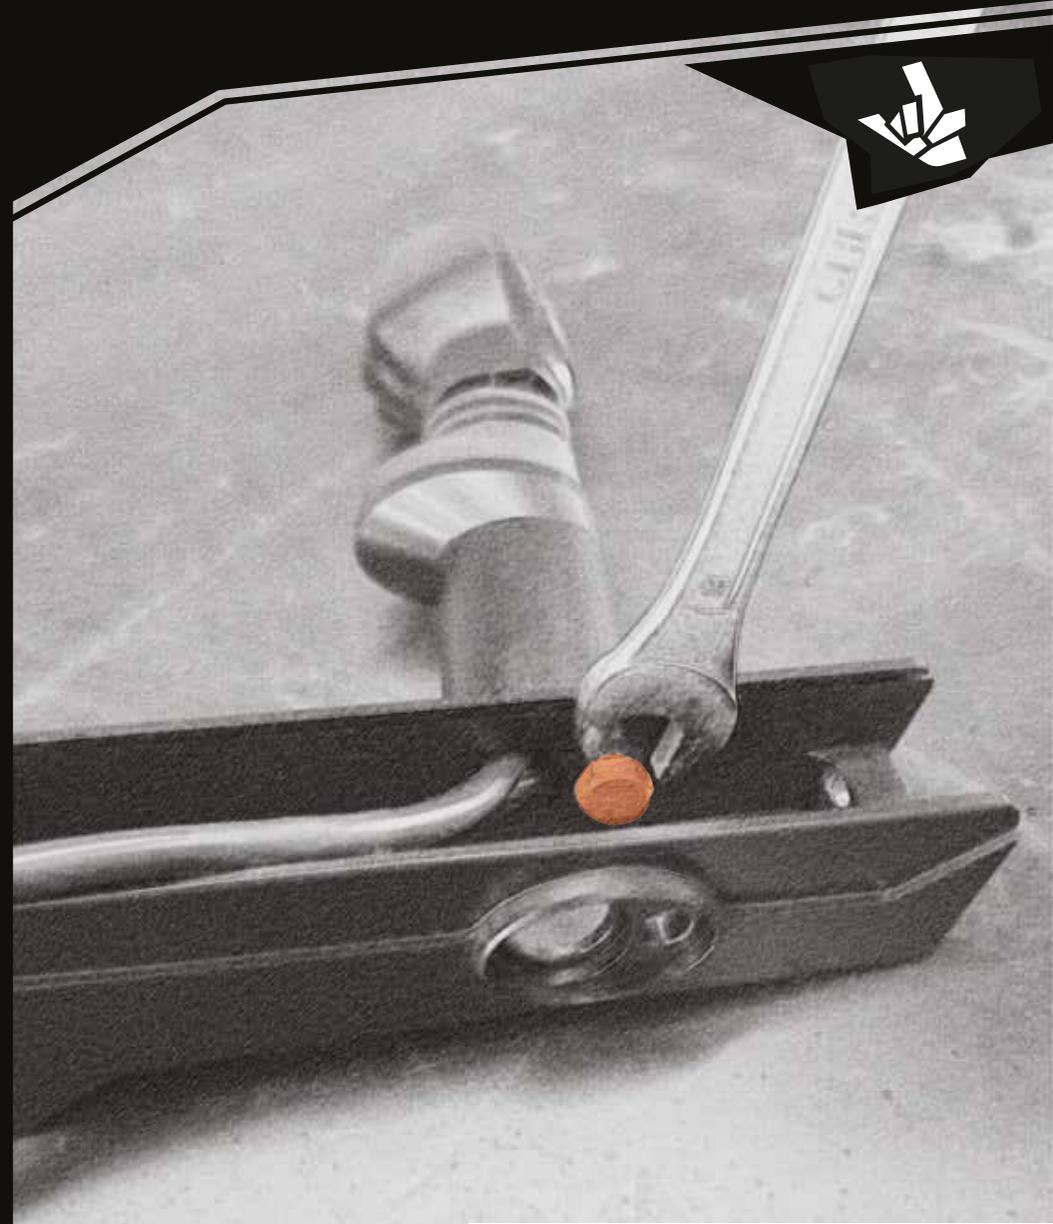


2. Insert bolt **K**, tighten. Repeat on other side.

Installation Instructions 6.1




1. Put cables through the central unit **D**.

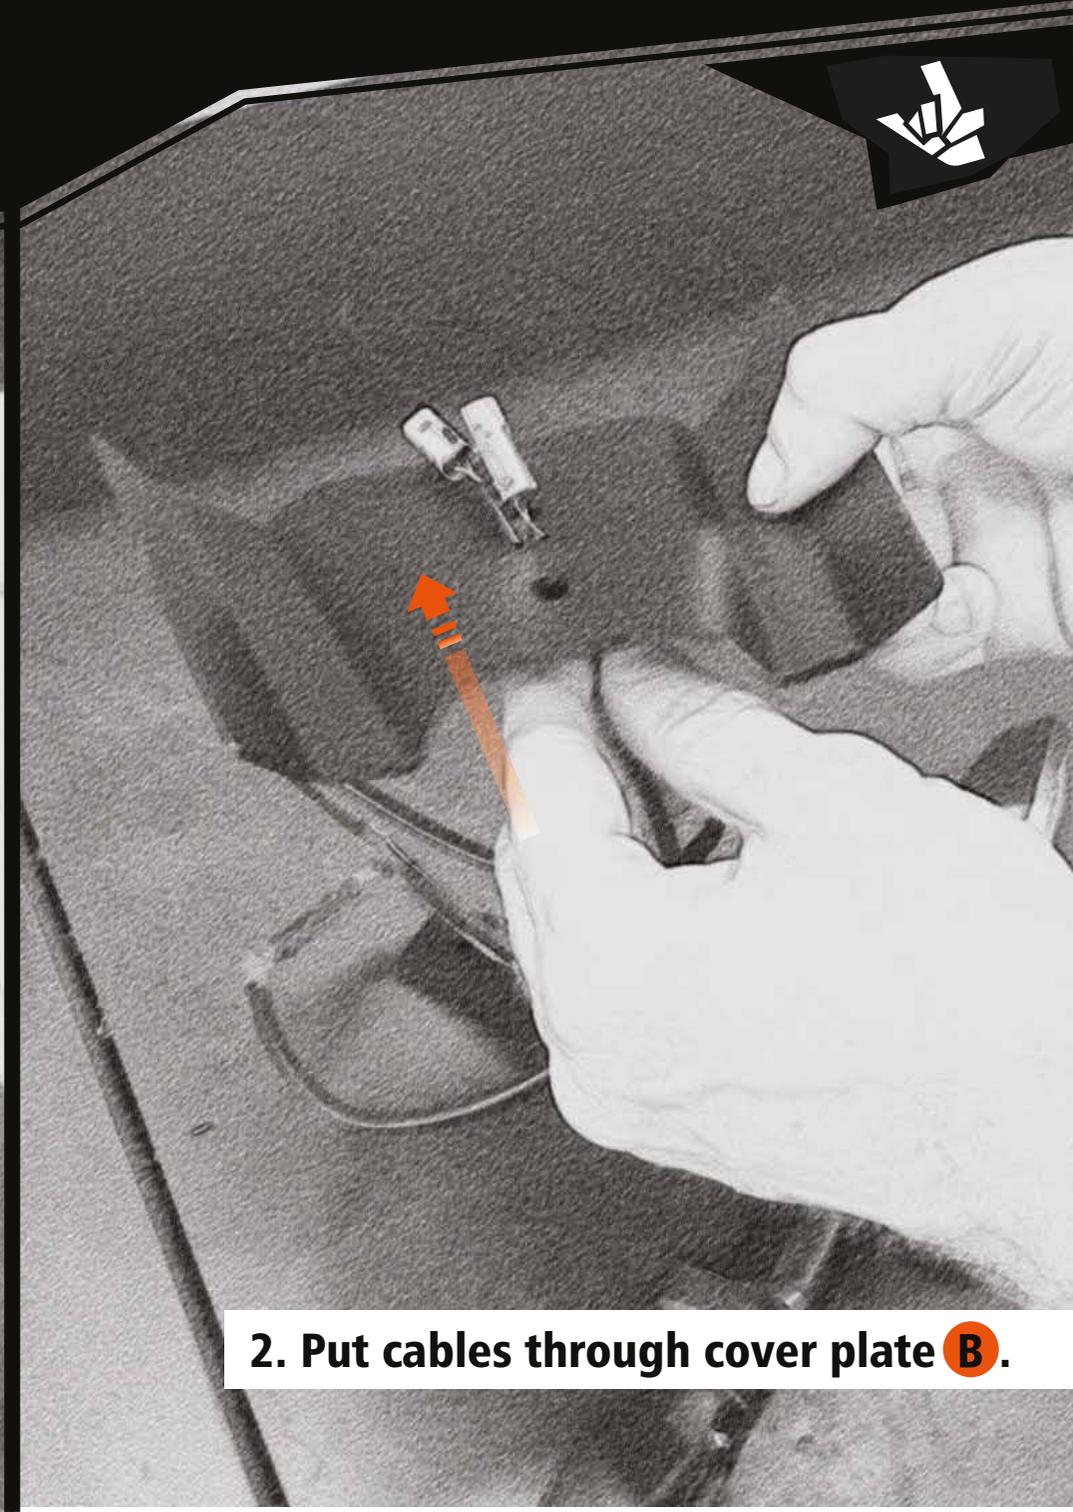


2. Put cables through cover plate **B**.

Installation Instructions **7**

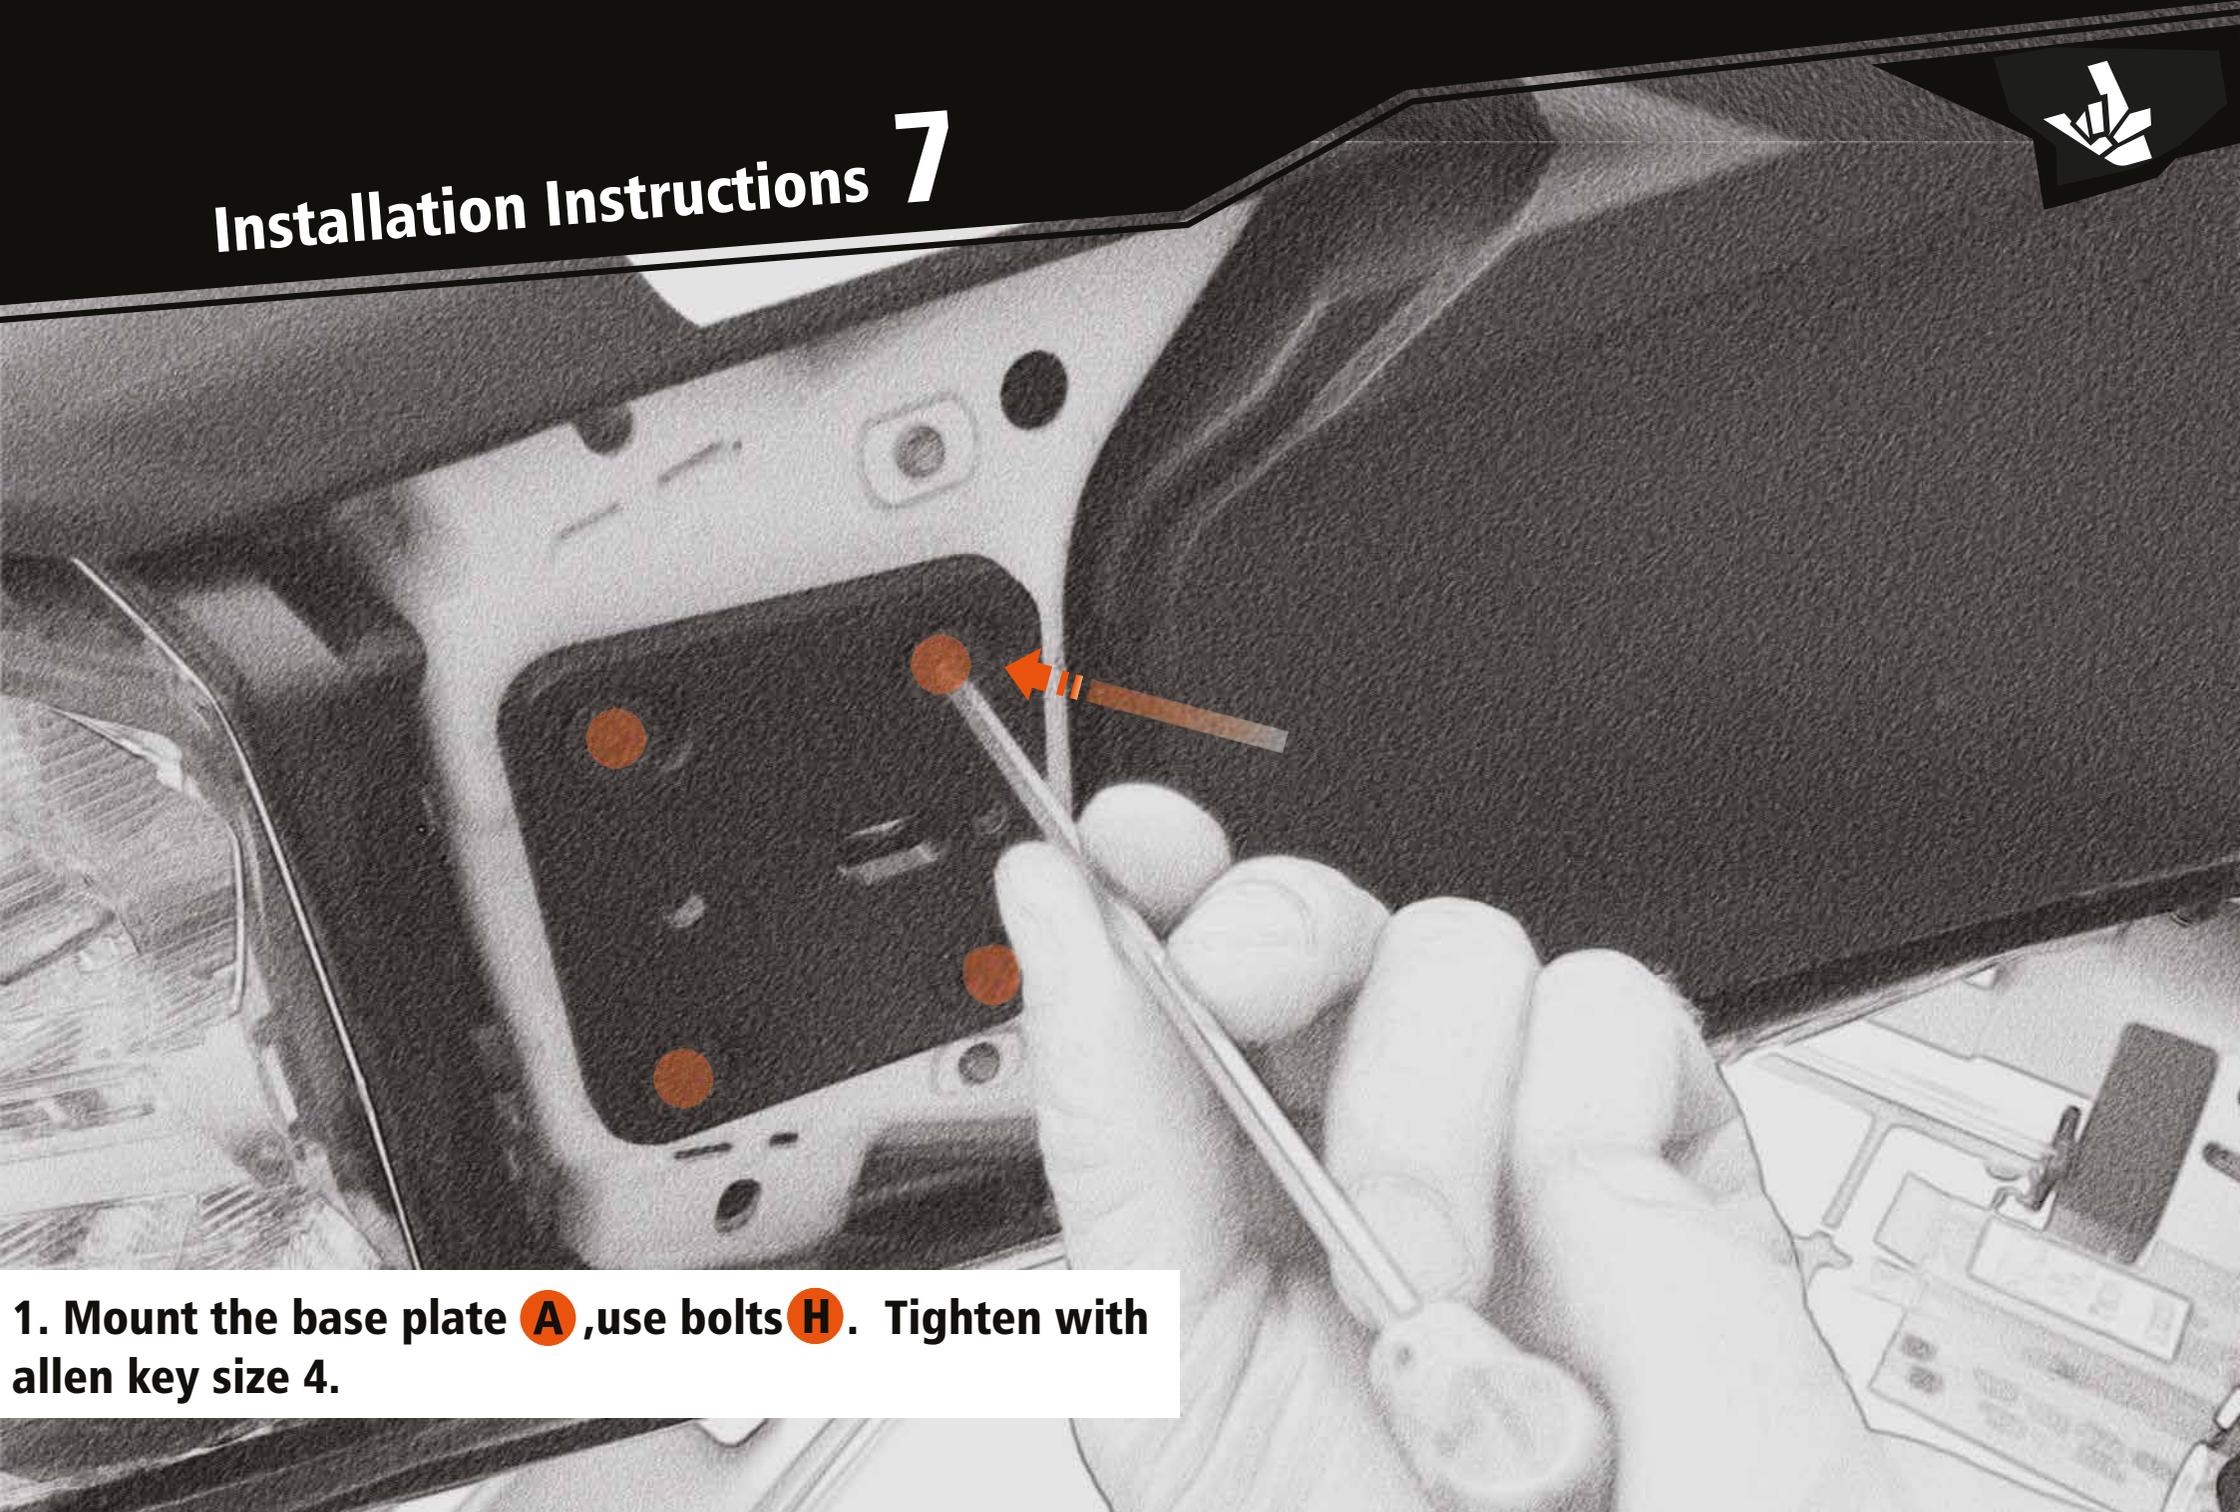


1. Mount the base plate **A, use bolts **H**. Tighten with allen key size 4.**

Installation Instructions 8

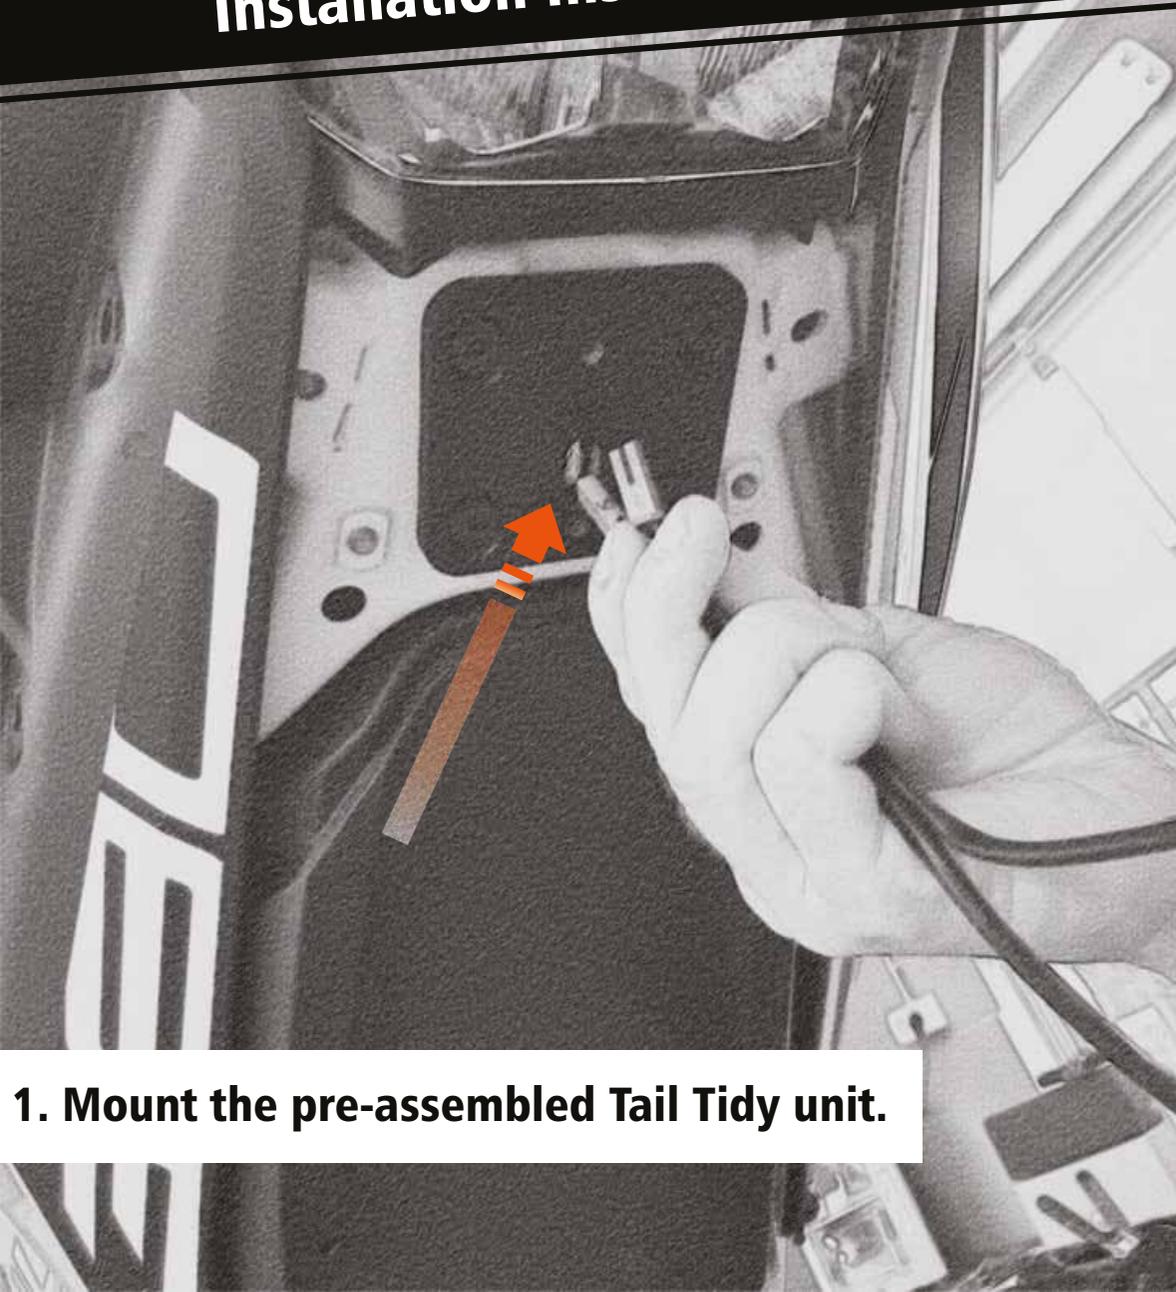


1. Mount the pre-assembled Tail Tidy unit.

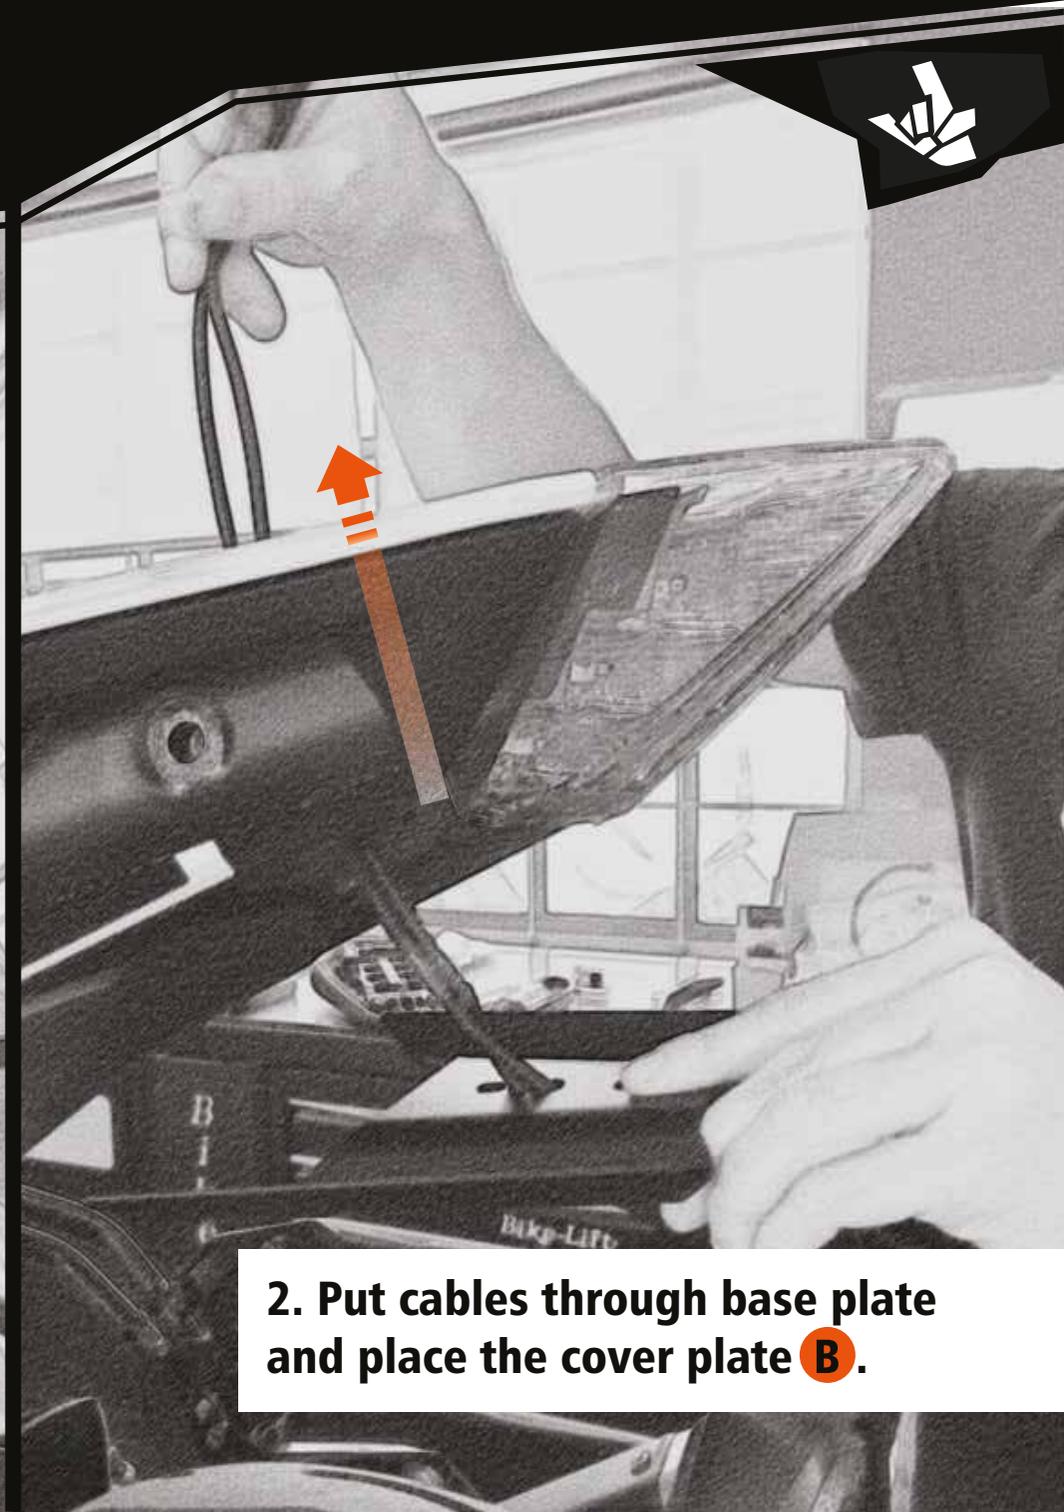


2. Put cables through base plate and place the cover plate **B**.


Installation Instructions 8.1

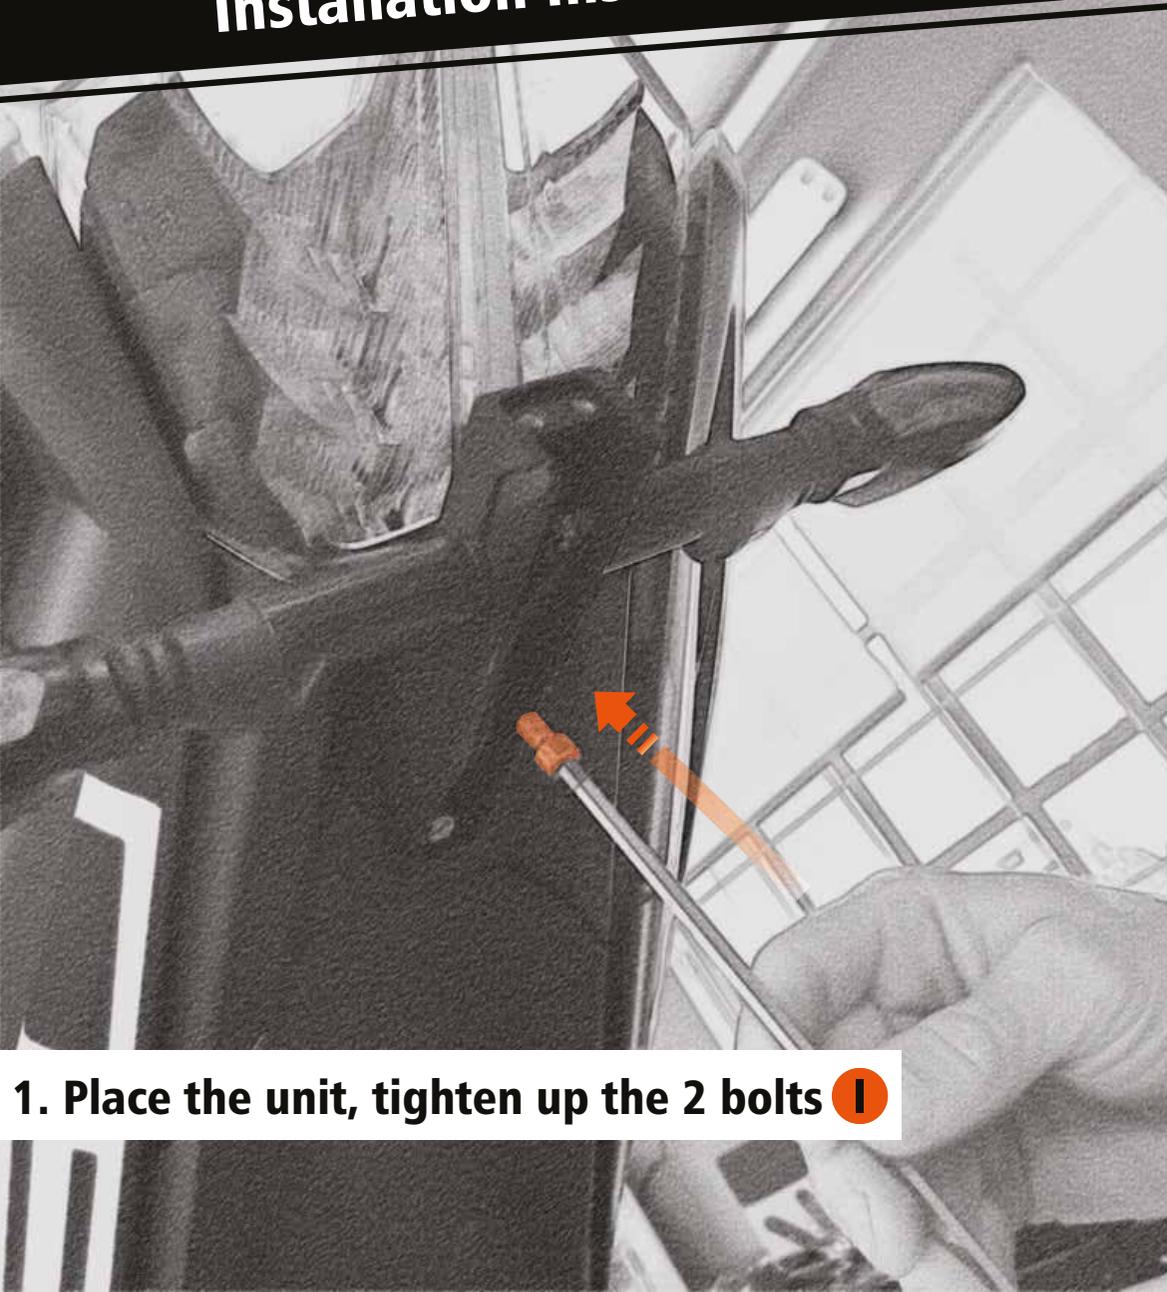


1. Place the unit, tighten up the 2 bolts **I**

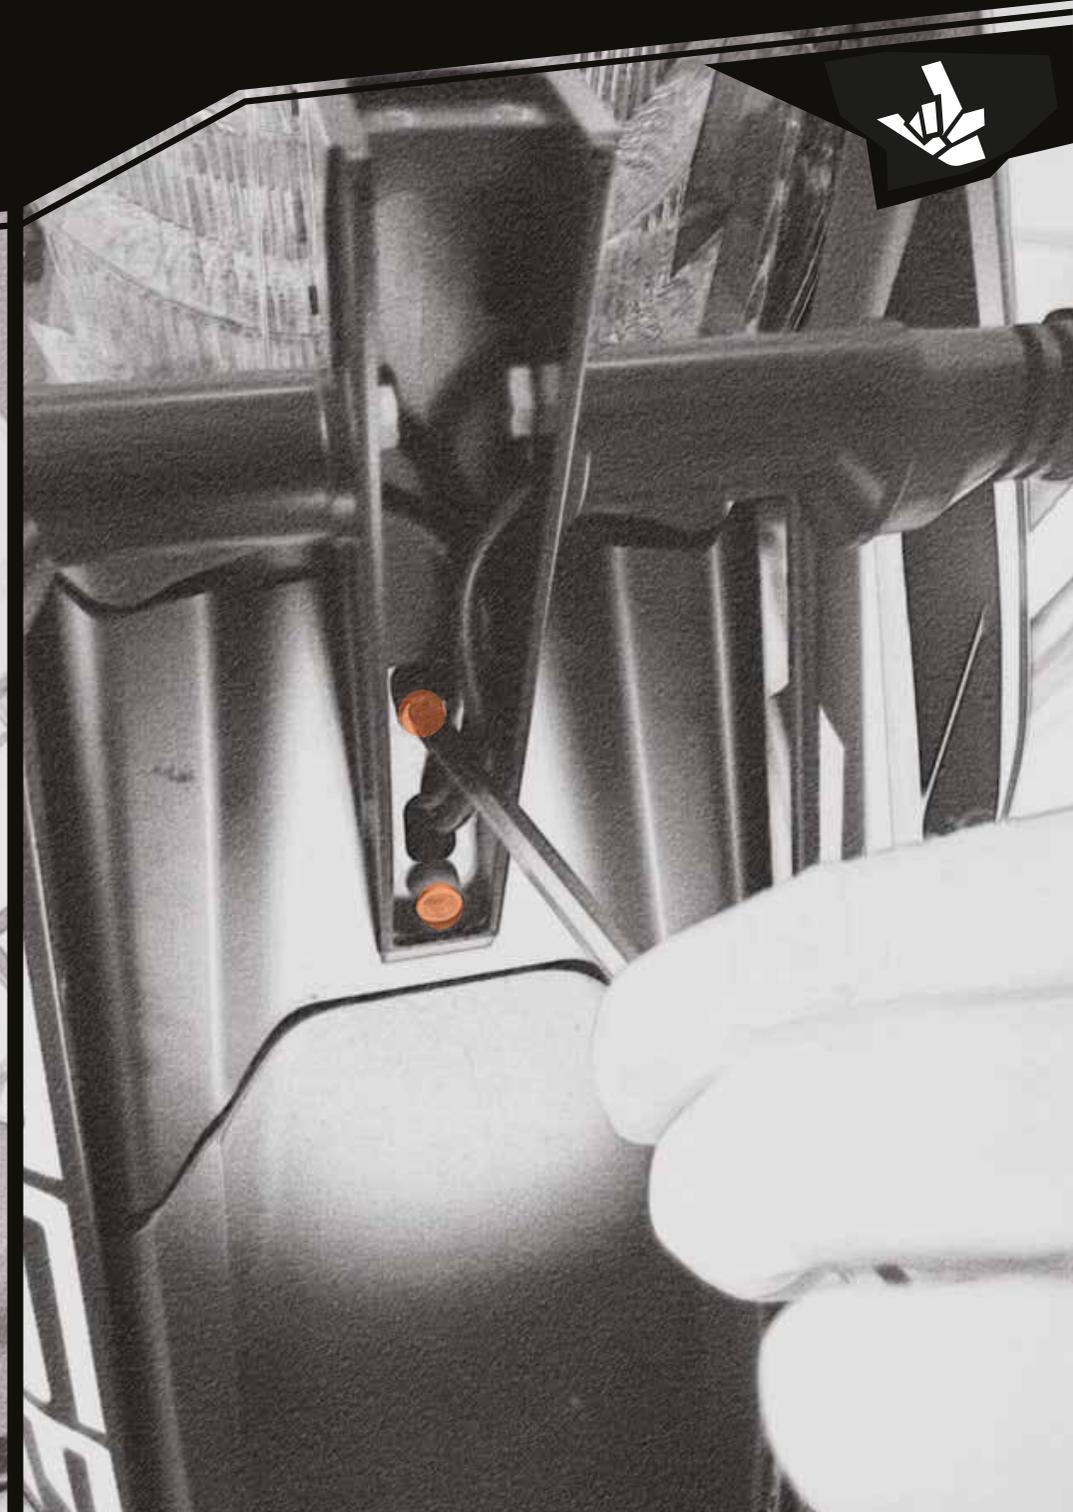

Installation Instructions 9

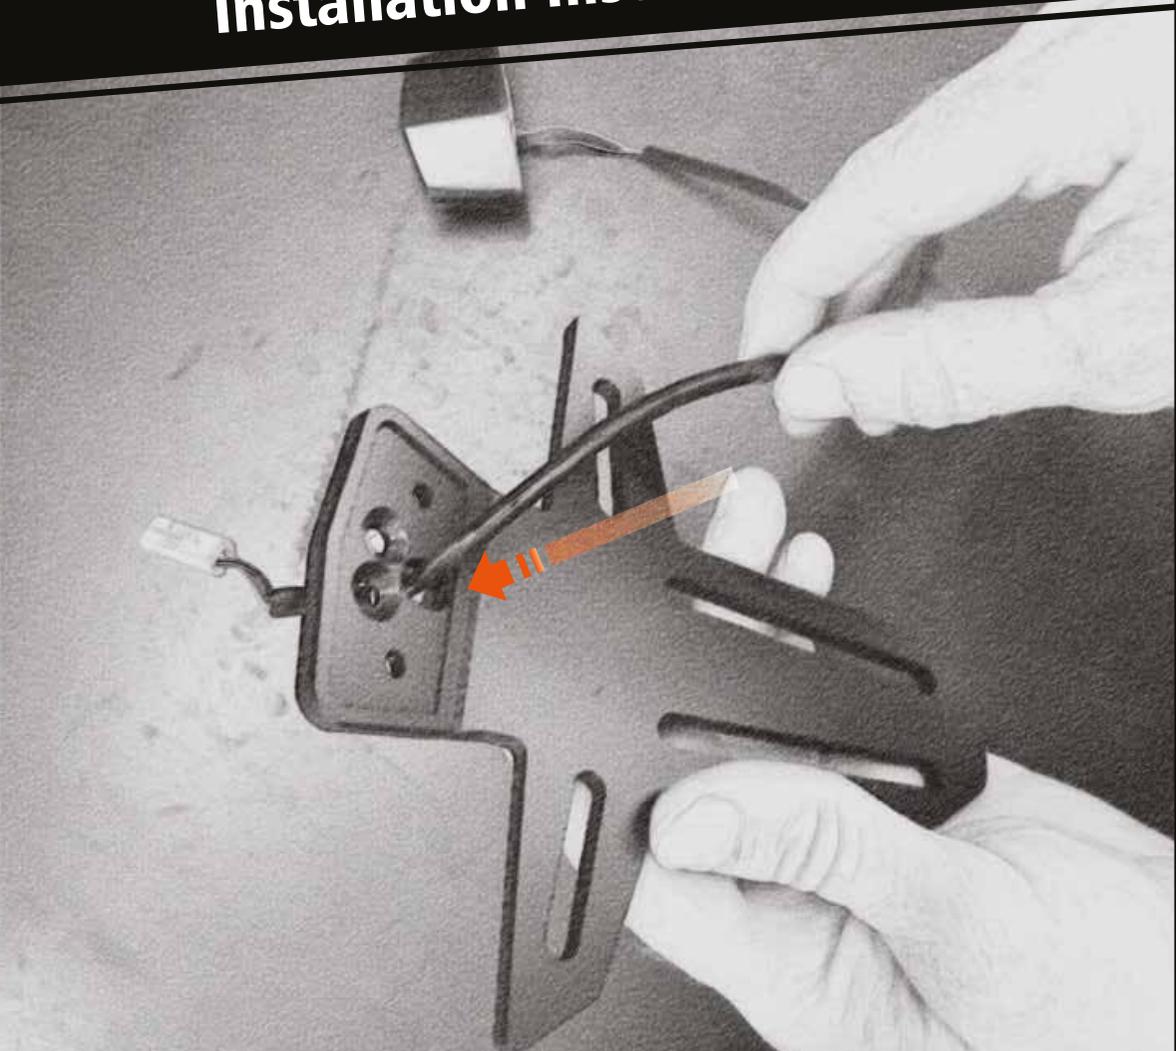

1. Insert number plate light cable through number plate bracket **C**.

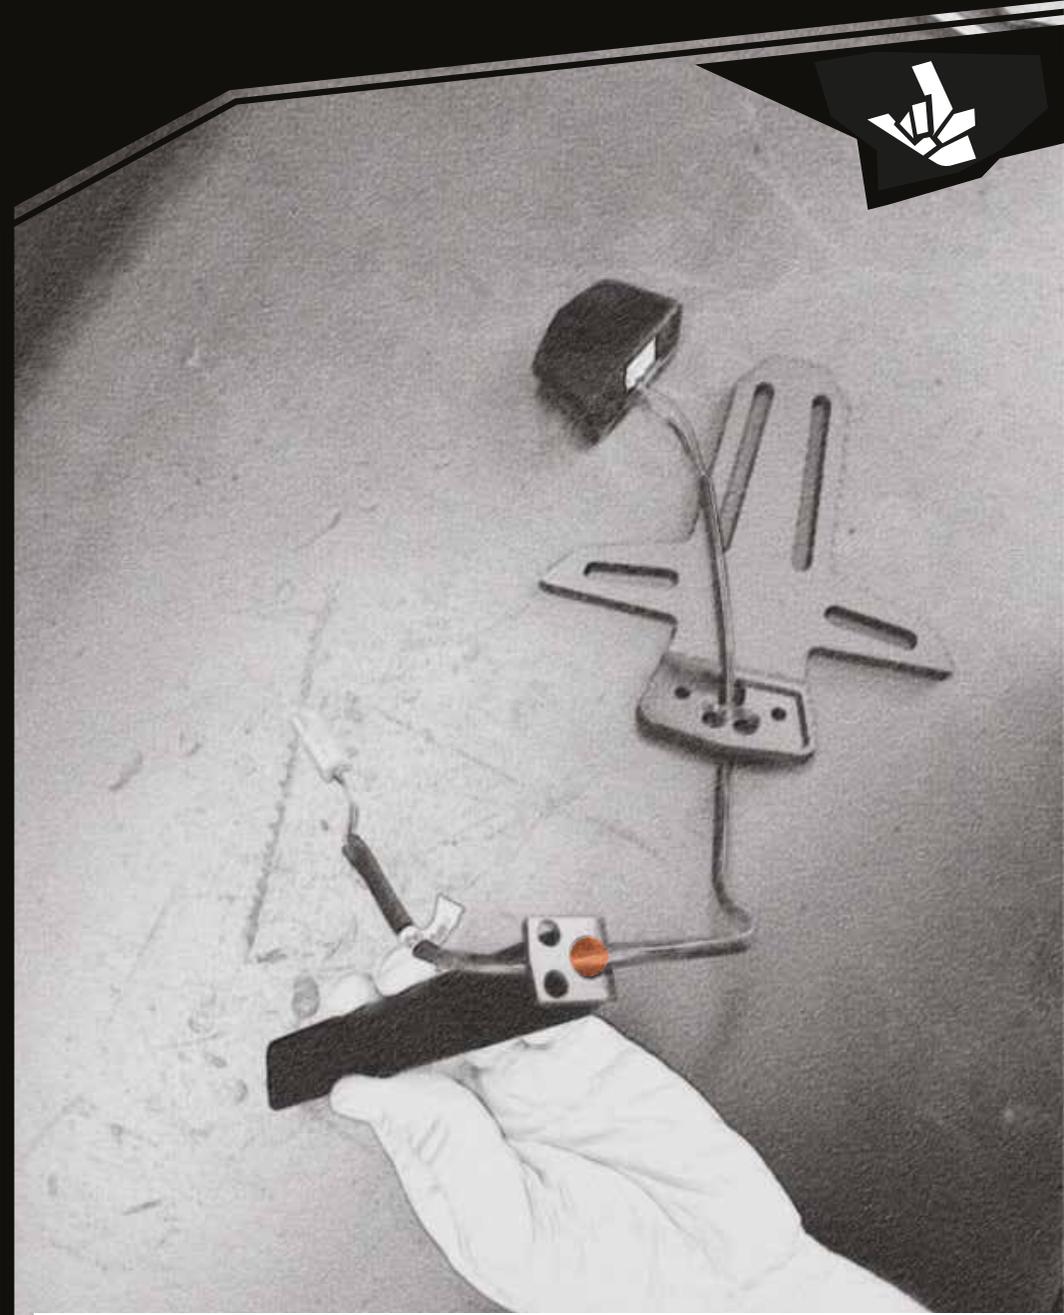


2. Insert number plate light cable through slide doors **E**.

Installation Instructions 9.1




1. Insert the cables with slide door **E** and number plate bracket **C**.

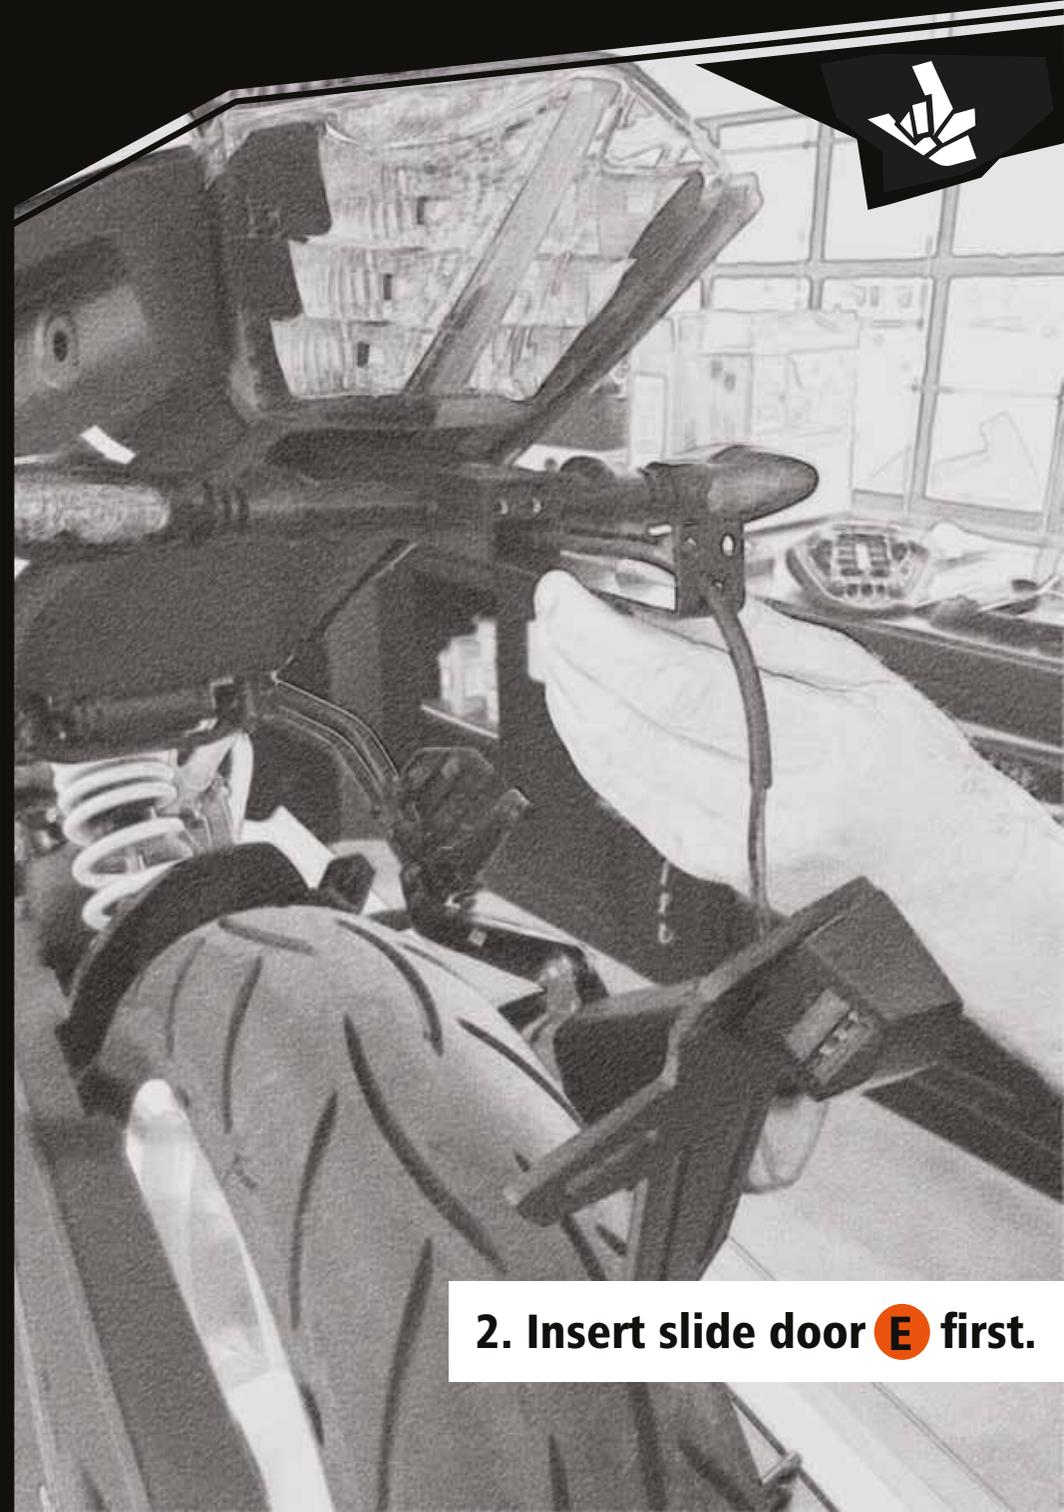

2. Insert slide door **E** first.



Installation Instructions 9.2

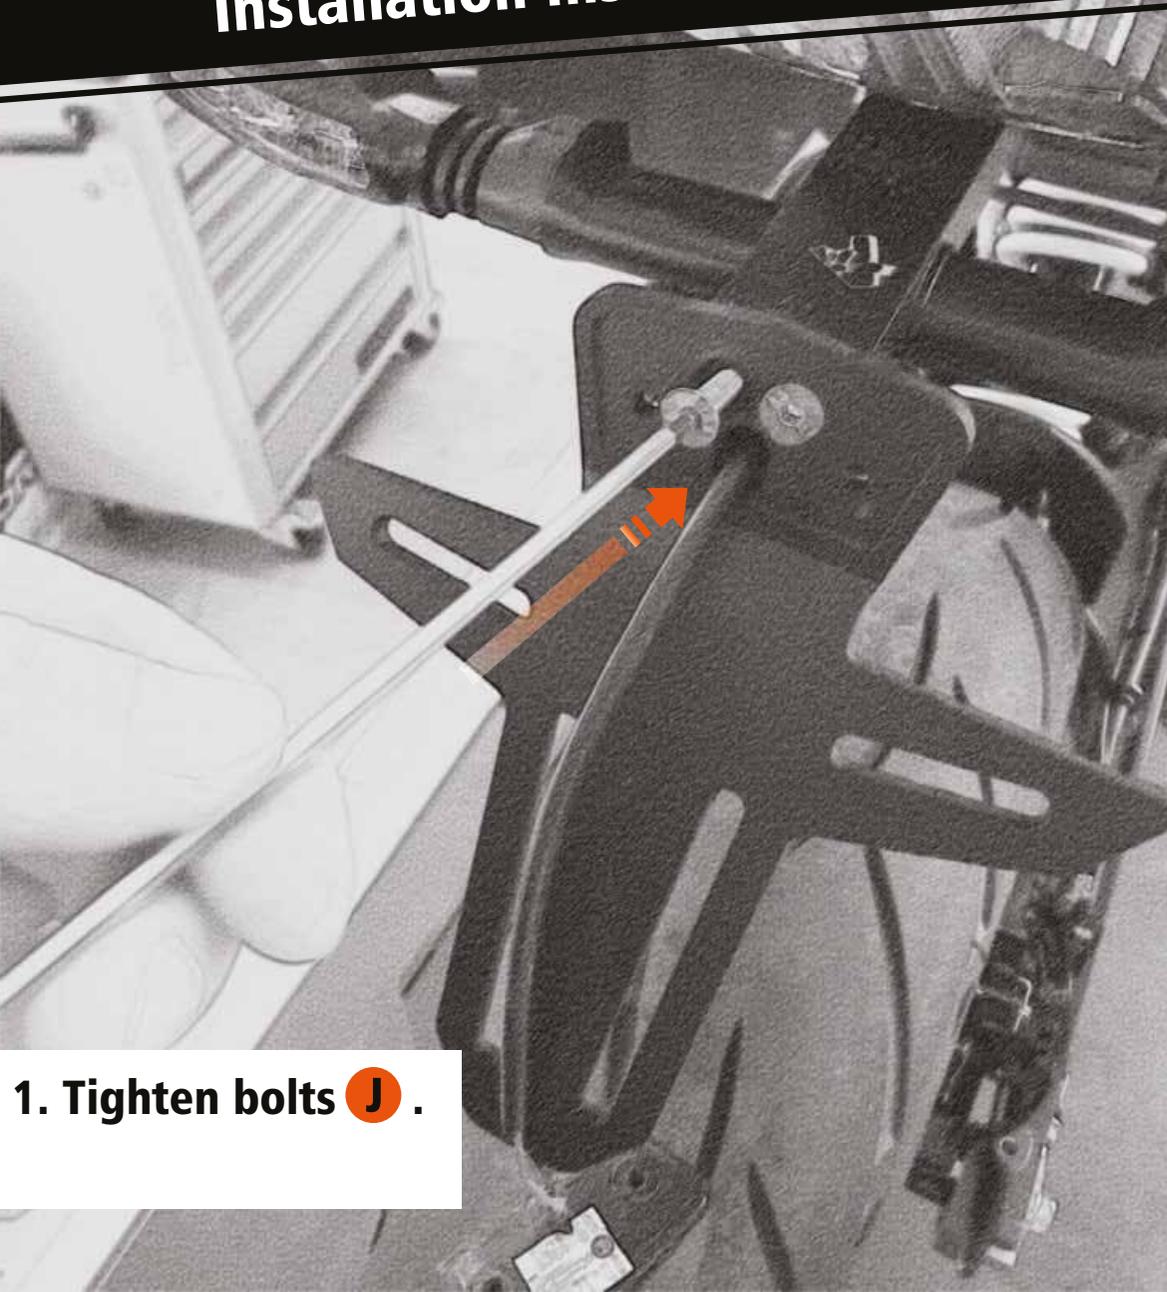


1. Tighten bolts **J**.




2. Mount the number plate light with the OEM bolts.



Installation Instructions 9.3

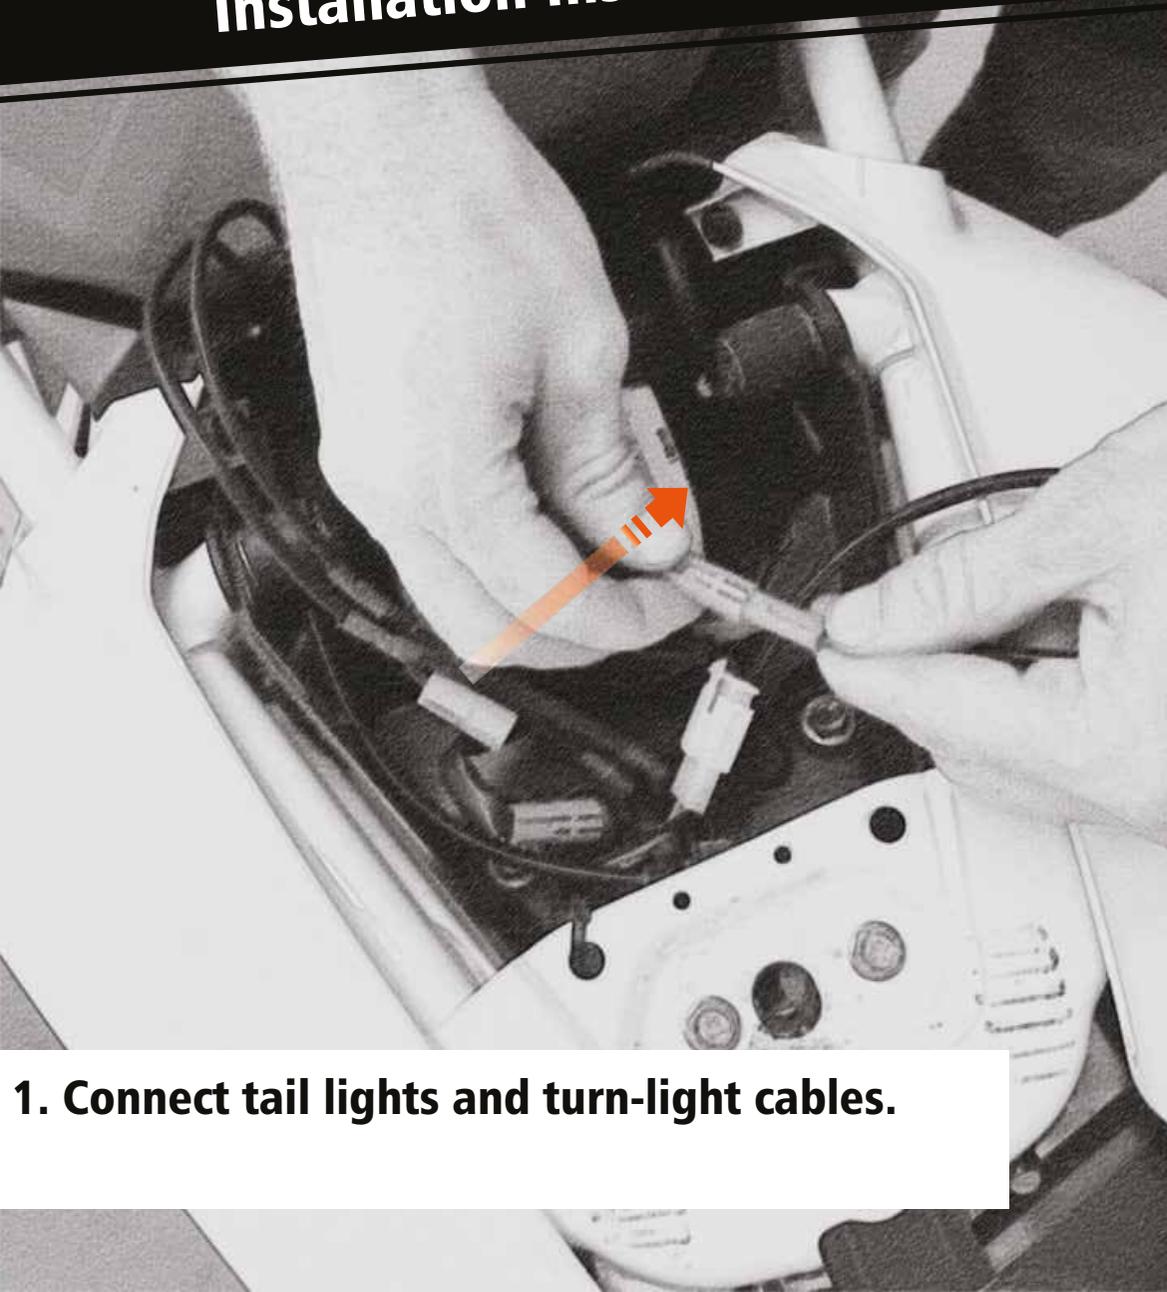

1. Connect tail lights and turn-light cables.

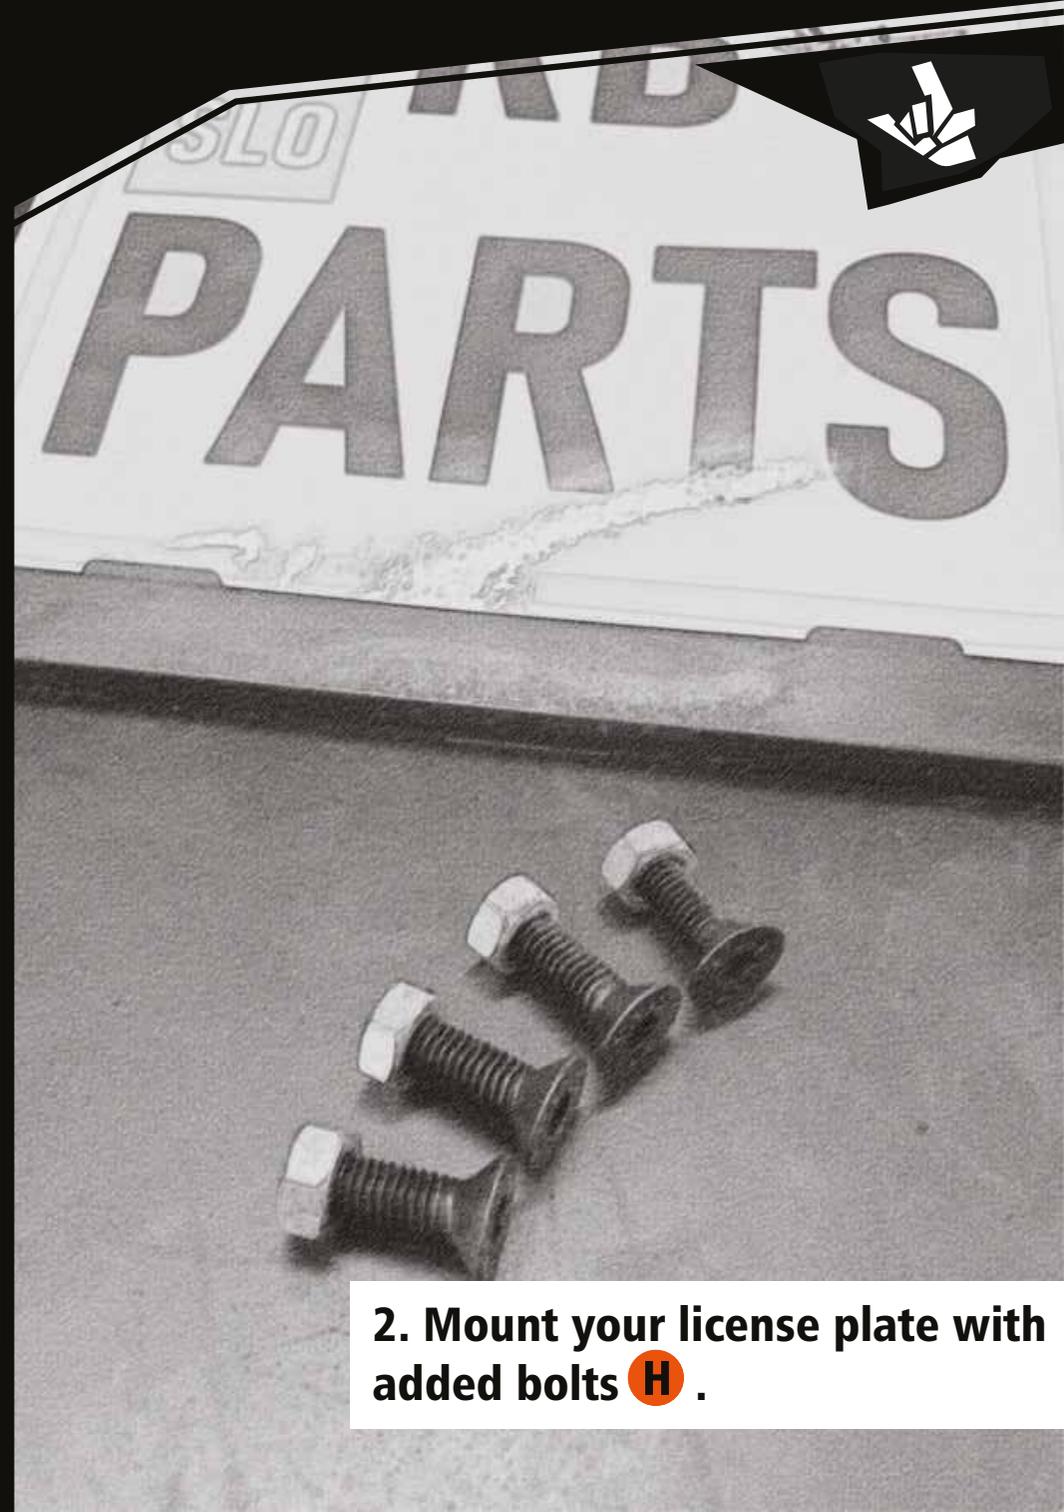

2. Mount your license plate with added bolts **H**.

IMPORTANT

After installation of your tail tidy ensure that the license plate does not contact the rear tyre when suspension is fully compressed.

It is recommended that periodic inspections are made to ensure that all bolts are tightened.

Should the bike be involved in an accident, a thorough inspection should be made and any components that have taken an impact, no matter how small, must be replaced.

The manufacturer or supplier cannot be held responsible for products that are incorrectly mounted or inappropriately used.

It is recommended to check all connections regularly for tightness of fit.

Ensure all electrics including indicators, tail light, brake light and licence plate light are working correctly before riding the motorcycle.

**NOW YOU ARE READY...
TO ROCK THE STREETS!**



bagorosperformance.com