




TAIL TIDY

Installation Instructions

KTM RC 390

MODEL YEAR 2022

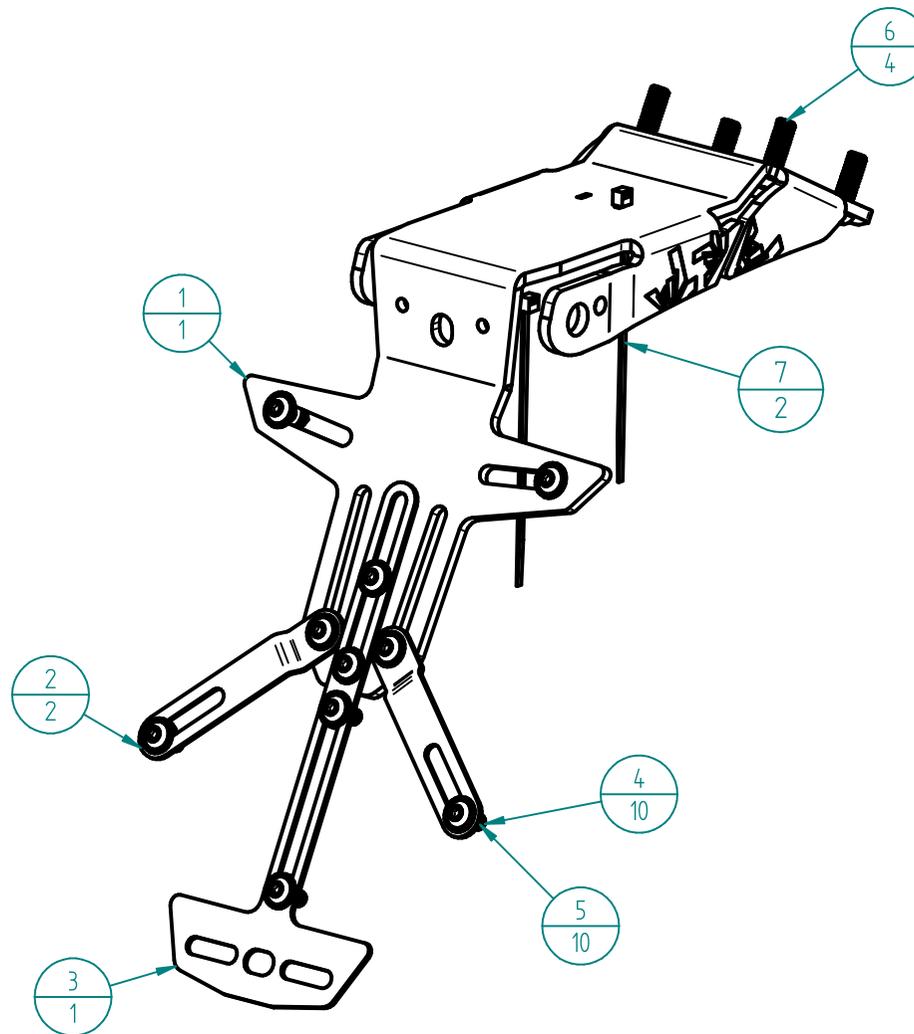

Item Number	Title	Quantity
1	Plate Holder Simple	1
2	Licence Plate Extension - Long	2
3	Reflector holder	1

Item Number	Title	Quantity
4	BOLT M5X12 A2 DIN/ ISO7380-2	10
5	NUT M5 A2 DIN6923 ISO4161	10
6	Bolt M6X20 A2 DIN/ ISO7380-1	4
7	ZIP TIE 2x95 BLACK	2



STEP 1

Remove the driver seat, after that you can pull up on the tab marked on PICTURE 1 to access the cable compartment under the passenger seat.



STEP 2

Disconnect the cables using a small flathead screwdriver and put them to the side.

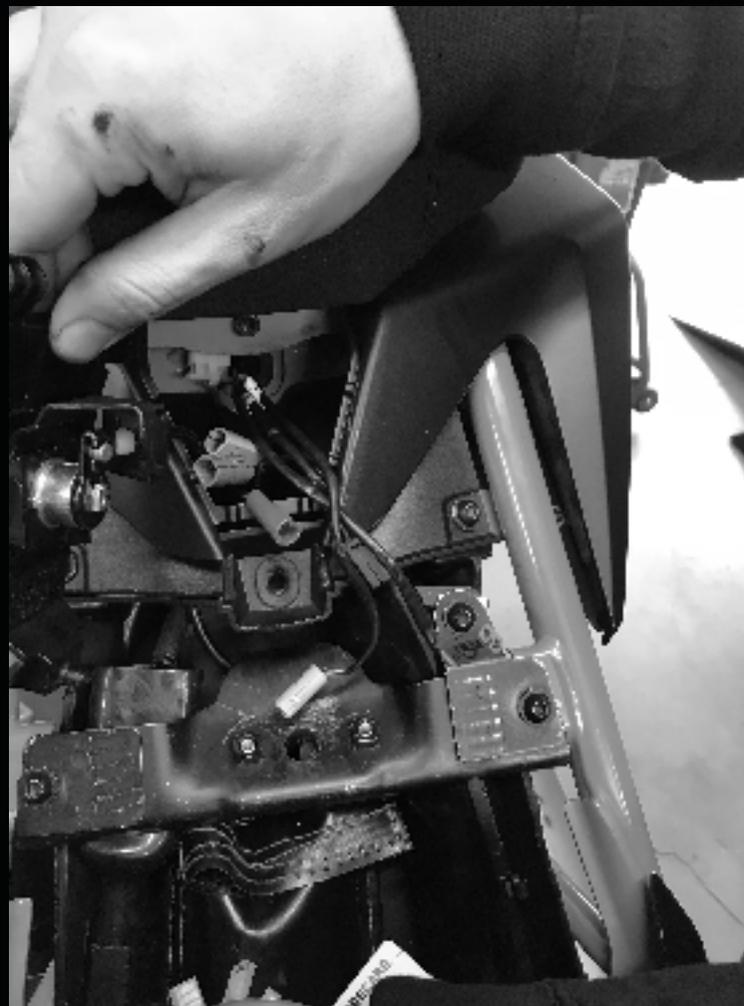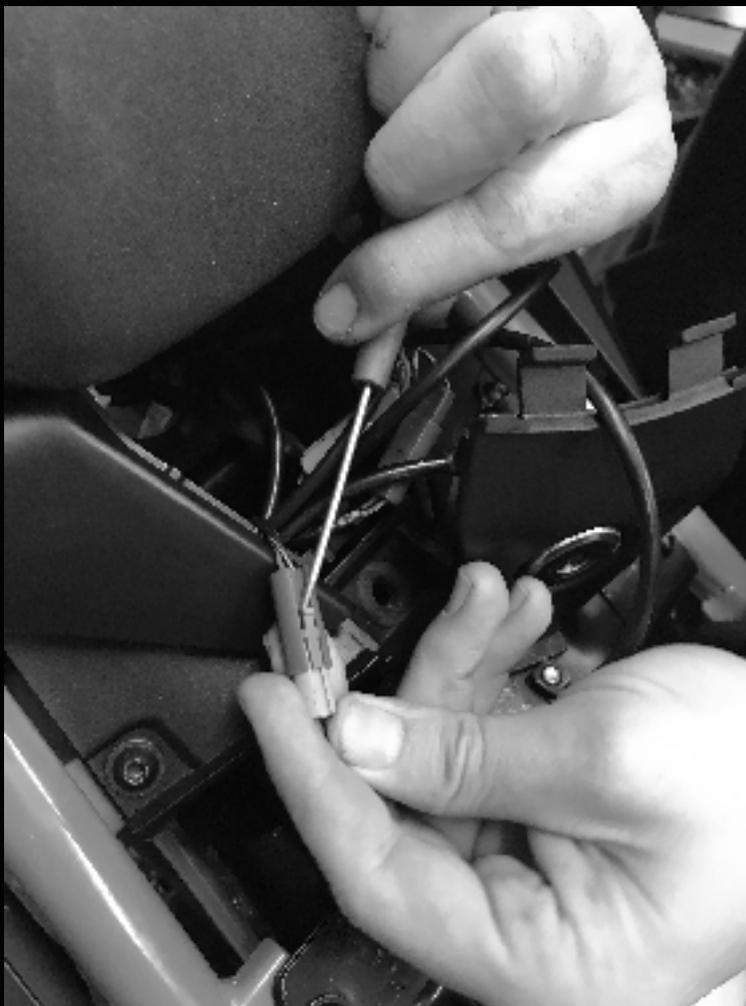


STEP 3

Now we can move to the underside of the tail. Using a allen key remove the 4 screws holding on the original tail tidy cover.







STEP 4

After you remove the cover you can see 4 more bolts holding the original tail tidy. Remove them using a allen wrench and pull the whole assembly from the bike.

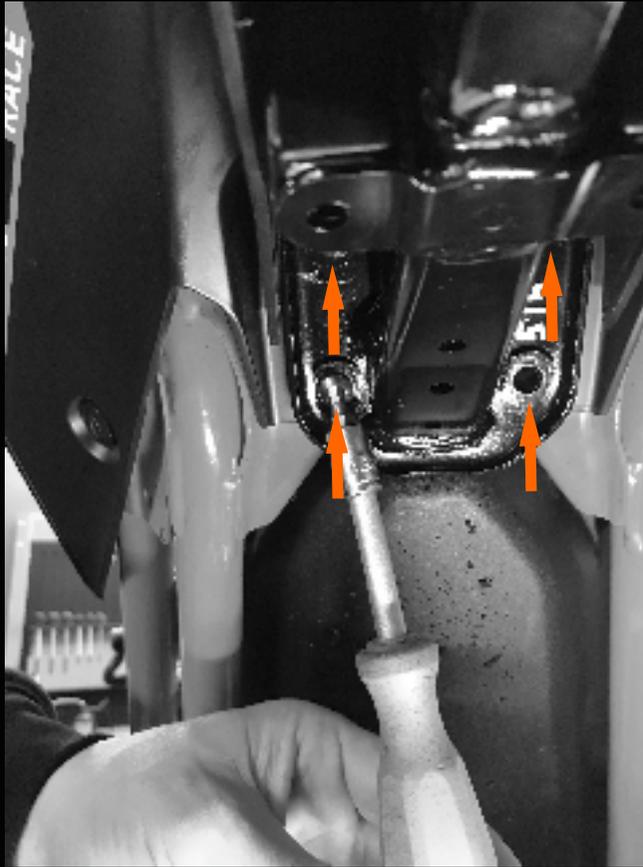


STEP 5

Now it's time to remove the turn signals and the license plate light from the original tail tidy. First unbolt the turn signals as shown in PICTURE 2, then push on the clips marked on PICTURE 3. You can now separate the plastic cover from the tail tidy and get access to the 2 small screws holding on the license plate light.

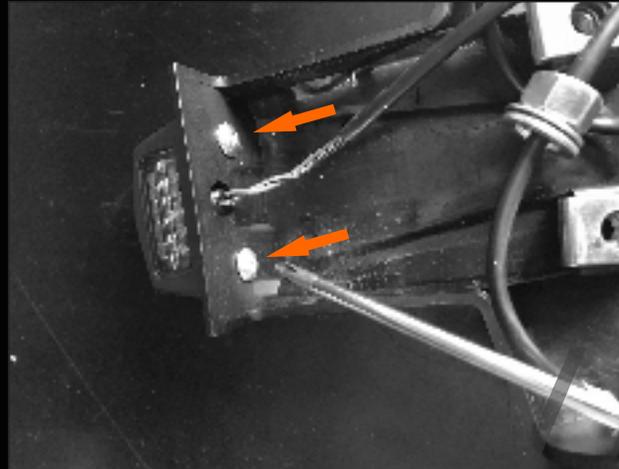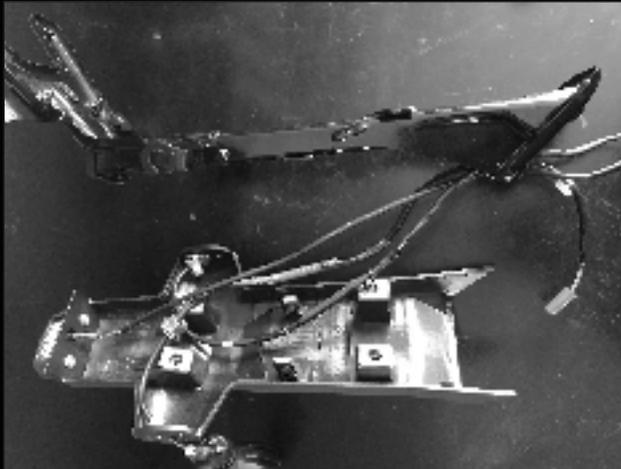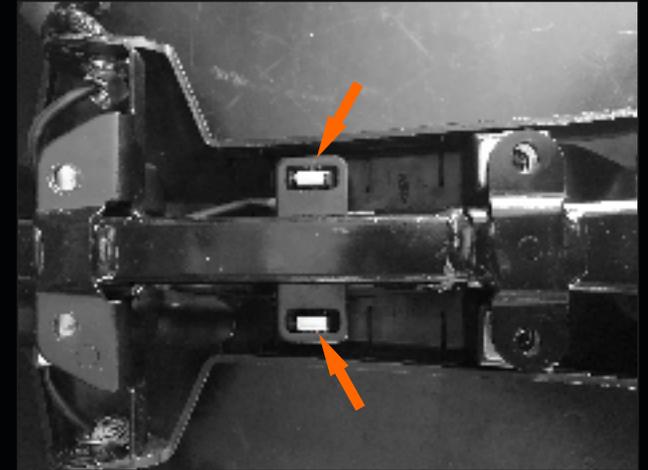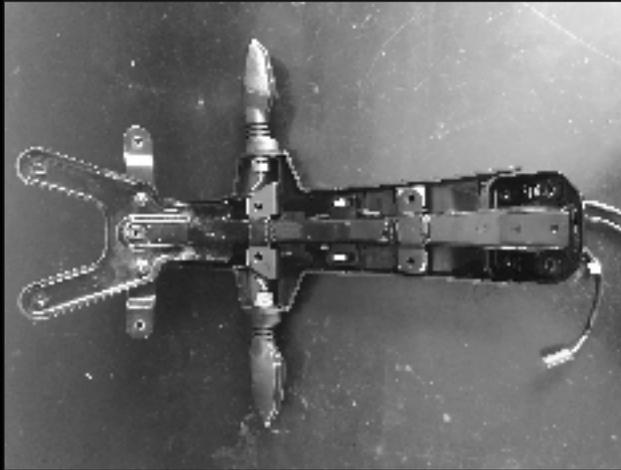



STEP 6

Now it's time to assemble the new tail tidy. First put on the original turn signal in the order as shown in the PICTURE 1 (use lock nut washer so you dont lose the turn signals), next install the original license plate light from STEP 5.

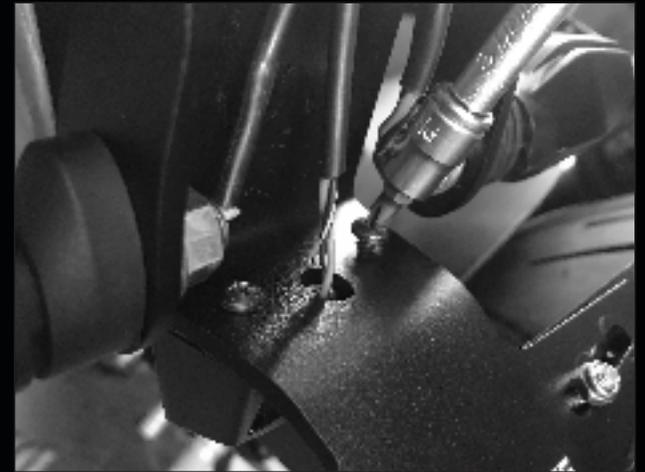


STEP 7

Feed the cables through the hole.

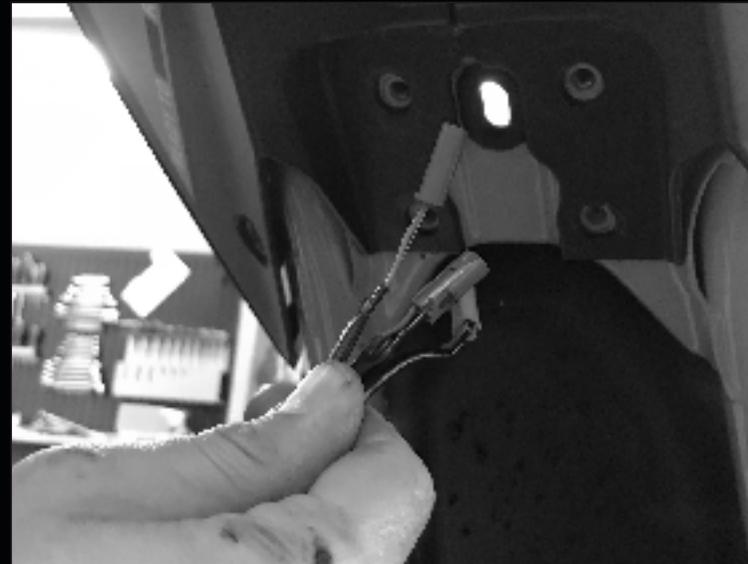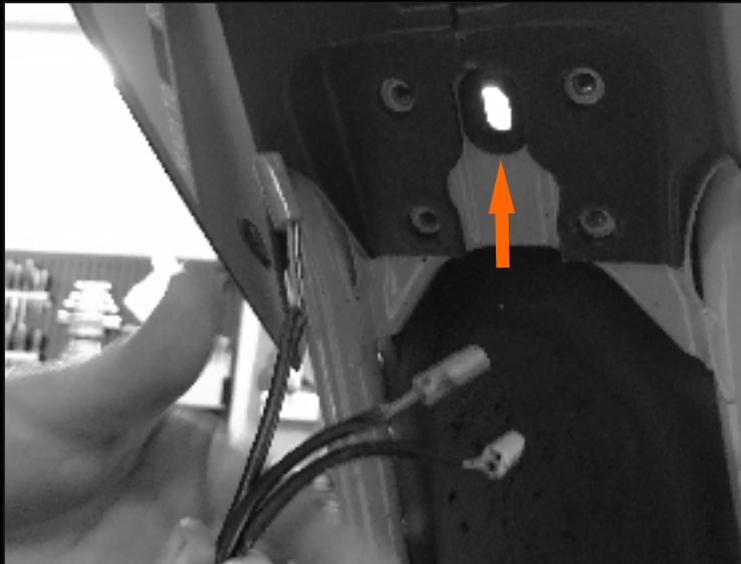


STEP 7.1

With the cables through you can attach the tail tidy to the original holes using the provided bolts in the kit.

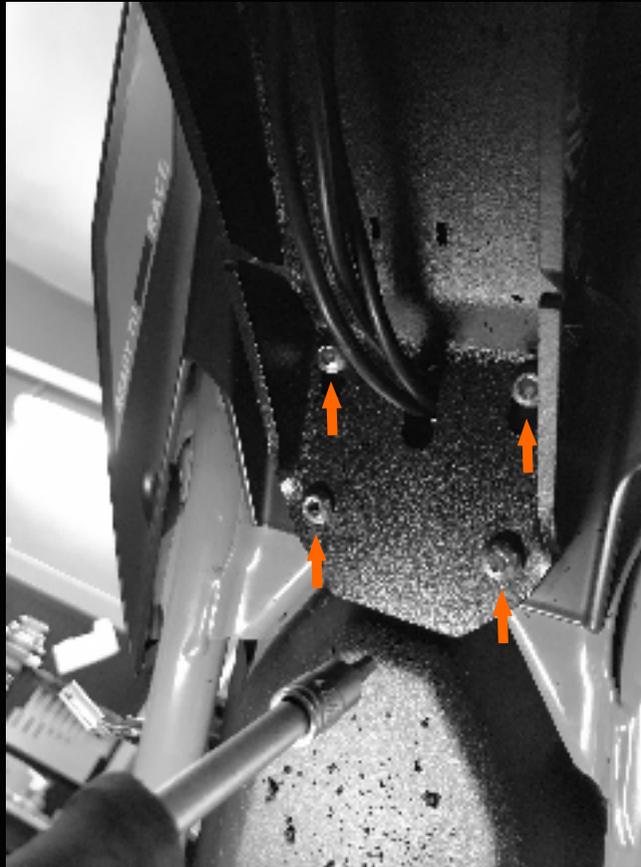

STEP 8

Pull the cables all the way through, connect them and push them inside the compartment. After that you can push down the plastic cover with the lock. Then all that's left is to put back the driver seat and hit the road!

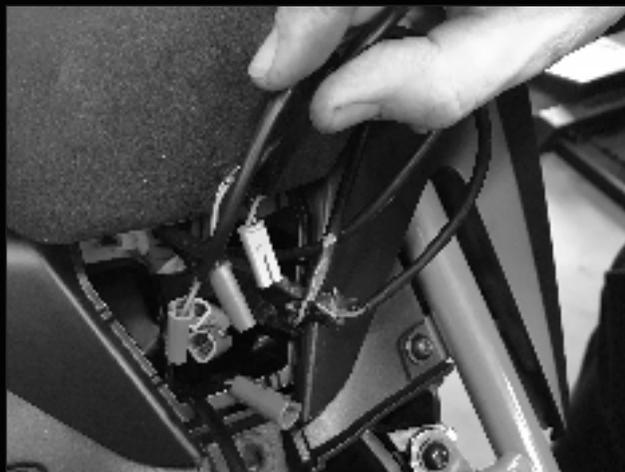

IMPORTANT

It is recommended that periodic inspections are made to ensure that all bolts are tightened to the specified torque settings. Should the bike be involved in an accident a thorough inspection should be made and any components that have taken an impact, no matter how small, be replaced.

The manufacturer or supplier cannot be held responsible for products that are incorrectly mounted or inappropriately used.

It is recommended to check all connections regularly for tightness of fit.



<https://bagorosperformance.com/product/tail-tidy-simple-for-ktm-rc-390/>

A decorative graphic consisting of several parallel, slanted grey bars of varying lengths, positioned at the bottom right of the page.